



Control Architecture for Multiple Autonomous Unmanned Vehicle Operations – Simulation Results

F. Maurelli, Z. Saigol, J. Cartwright, and D. M. Lane
Ocean Systems Laboratory
Department of Electrical, Electronic and Computer Engineering
School of Engineering and Physical Sciences
Heriot-Watt University

Project Manager: D. M. Lane, +44 (0) 131 451 3328
Contract Number: W7714-115079/001/SV
Contract Scientific Authority: B. U. Nguyen, 613-947-9759 and F.-A. Bourque, 613-992-3206

The scientific or technical validity of this Contract Report is entirely the responsibility of the Contractor and the contents do not necessarily have the approval or endorsement of Defence R&D Canada.

This document contains proprietary information. It is provided to the recipient on the understanding that proprietary and patent rights will be respected.

DRDC CORA CR 2013-066
April 2013

Defence R&D Canada
Centre for Operational Research and Analysis

Maritime Operational Research Team
Director of Maritime Strategy

Control Architecture for Multiple Autonomous Unmanned Vehicle Operations

Simulation Results

F. Maurelli
Z. Saigol
J. Cartwright
D. M. Lane
Heriot-Watt University Ocean Systems Laboratory

Prepared by:

Ocean Systems Lab
Department of Electrical, Electronic and Computer Engineering
School of Engineering and Physical Sciences
Earl Mountbatten Building
Heriot-Watt University
Riccarton, Edinburgh, EH14 4AS Scotland

Project Manager: D. M. Lane, +44 (0) 131 451 3328

Contract Number: W7714-115079/001/SV

Contract Scientific Authority: B. U. Nguyen, 613-947-9759 and F-.A. Bourque, 613-992-3206

The scientific or technical validity of this Contract Report is entirely the responsibility of the Contractor and the contents do not necessarily have the approval or endorsement of Defence R&D Canada.

This document contains proprietary information. It is provided to the recipient on the understanding that proprietary and patent rights will be respected.

Defence R&D Canada – CORA

Contract Report

DRDC CORA CR 2013-066

April 2013

Principal Author

Original signed by F. Maurelli

F. Maurelli

Approved by

Original signed by Dr. R. E. Mitchell

Dr. R. E. Mitchell
Head Maritime and Air Systems OR

Approved for release by

Original signed by Paul Comeau

Paul Comeau
Chief Scientist

© Her Majesty the Queen in Right of Canada as represented by the Minister of National Defence, 2013

© Sa Majesté la Reine (en droit du Canada), telle que représentée par le ministre de la Défense nationale, 2013

Abstract

The aim of this paper is to present a distributed world model system for multi-robot cooperation. Information is stored in semantic form in an ontology, allowing unlimited new concepts to be added. Automatic exchange of information is driven by the prioritised information needs of each vehicle, and is robust in the face of high latency, low bandwidth, and lossy acoustic communications. The performances of different TDMA-based exchange policies were compared to a standard acknowledgement policy, through tests in simulation. Under certain conditions, particularly high packet loss, the matrix-based acknowledgement policies introduced here substantially reduced time to reliable exchange; the results suggest an adaptive exchange policy may perform best under varying conditions.

Résumé

Le rapport a pour objet la présentation d'un système distribué de modèle mondial visant une coopération multirobots. Les données sont stockées dans une ontologie sous forme sémantique, ce qui permet l'ajout illimité de nouveaux concepts. L'échange automatique de données dépend des besoins de renseignements priorisés de chaque véhicule et résiste à une latence élevée, à une largeur de bande étroite et à des pertes de communication acoustiques. On a comparé au moyen de simulations le rendement de différentes politiques d'échange fondées sur l'accès multiple par répartition temporelle (AMRT) avec une politique de reconnaissance normalisée. Dans certaines conditions, notamment dans le cas d'une perte élevée de paquets, les politiques de reconnaissances reposant sur une matrice ont permis de réduire considérablement le délai d'échange fiable, ce qui laisse croire qu'une politique d'échange adaptative peut s'avérer optimale dans certaines conditions variables.

This page intentionally left blank.

Executive summary

Control Architecture for Multiple Autonomous Unmanned Vehicle Operations

F. Maurelli, Z. Saigol, J. Cartwright, D. M. Lane; DRDC CORA CR 2013-066; Defence R&D Canada – CORA; April 2013.

Introduction: AUV missions are increasing and cooperation among a fleet of AUVs is a need. This project addresses the topic of a decentralised world model service that operates across multiple underwater vehicles, focusing on communication strategies.

Challenges: This section presents the challenges which are still open and that this project addresses.

Proposed System: The proposed system is based on a World model system, which represents and updates the model of the world, based on pre-acquired knowledge and updates from sensors. A particular emphasis is given to the communication among vehicles, considering a temporal context and the restrictions of the underwater domain.

World Modeling and Ontologies: A presentation of the world data representation is given, citing relevant literature and providing information about internal structure of ontologies.

Acknowledgement Policies: Three packet acknowledgement policies of increasing complexity are presented.

Results in simulation: The three acknowledgement policies are implemented in simulation and the results are analysed.

Conclusions and Future Work: This section summarises the results and gives guidelines for future work leading to field trials.

Sommaire

Control Architecture for Multiple Autonomous Unmanned Vehicle Operations

F. Maurelli, Z. Saigol, J. Cartwright, D. M. Lane ; DRDC CORA CR 2013-066 ; R & D pour la défense Canada – CARO ; avril 2013.

Introduction : Un nombre croissant de missions sont menées à l'aide de véhicules sous-marins autonomes (AUV), lesquels doivent coopérer. Dans le cadre du projet, on traite d'un service de modèle mondial décentralisé qui est exploité parmi de multiples véhicules sous-marins et on met l'accent sur des stratégies de communication.

Défis : Dans la présente section, on aborde les défis actuels qui sont visés par le projet.

Système proposé : On propose un système qui représente et met à jour le modèle mondial en fonction de renseignements et de mises à jour acquis au préalable par des capteurs. On met en relief la communication entre les AUV tout en tenant compte d'un contexte temporel et de contraintes du domaine sous-marin.

Modélisation du monde et ontologies : On offre une représentation de données mondiales, mentionne des ouvrages pertinents et fournit des renseignements sur la structure interne d'ontologies.

Politiques de reconnaissance : On y présente trois politiques de reconnaissances de paquets d'une complexité croissante.

Résultats de simulation : On analyse les résultats de la mise en oeuvre des trois politiques au moyen de simulation.

Recherches futures : On résume les résultats obtenus et présente des lignes directrices quant aux futurs travaux qui donneront lieu à des essais sur place.

Table of contents

Abstract	i
Résumé	i
Executive summary	iii
Sommaire	iv
Table of contents	v
List of figures	vi
1 Introduction	1
2 Challenges	3
3 World Modeling and Ontologies	5
4 Acknowledgement Policies	7
4.1 Problem Definition	7
4.2 Policy: Standard ACK	7
4.3 Policy: M-ACK	8
4.4 Policy: MPS-ACK	9
5 Results in simulation	10
6 Conclusions and Future Work	13
References	14
References	15

List of figures

Figure 1:	The world model in a simple three-layer robot control architecture	1
Figure 2:	Proposed world model architecture	4
Figure 3:	Results in simulation with $N = 5$ and one information item distributed by node 1. Graph shows mean time until information source has confirmed delivery to all nodes, relative to baseline ACK policy (smaller is better). M-ACK-repeat and MPS-ACK-repeat consistently beat the other policies here, but at higher PER, MPS-ACK is not far behind. Baseline ACK policy performs worst. Note that this metric doesn't take account of time required for other nodes to have confirmed delivery, if repeating.	10
Figure 4:	Results in simulation with $N = 5$ and one information item distributed by node 1. The graph shows mean time until all senders (1 or 5, depending on the chosen policy) have confirmed delivery to all other nodes, relative to baseline ACK policy. Naive repeating with ACK-repeat generally performs worse than ACK. Overall, this figure suggests that at lower PER, the best results are achieved by using repeating with either matrix-based policy. However, at higher PER, the benefits of the MPS-ACK policy dominate.	11
Figure 5:	Results in simulation with $N = 10$ and one information item to be distributed by node 1. Graph shows mean time until all senders (1 or 10, depending on the chosen policy) are aware of delivery to all other nodes, relative to baseline ACK policy. Compared to the $N = 5$ test case in figure 4, here there is a slightly more pronounced difference between policies with and without repeating.	12

1 Introduction

The coming generation of Autonomous Underwater Vehicle (AUV) missions are requiring that vehicles operate without human assistance for extended periods of time (days), in environments that are imprecisely known. Examples of such persistent autonomy needs are present in over the horizon surveillance or mapping (for security and marine science), and in deep-water oilfields (for inspection, repair and maintenance). To accelerate progress of these missions, multiple vehicles may be expected to operate simultaneously, exhibiting collaboration in their execution of tasks.

Equipping vehicles to execute these missions successfully requires that they are able to represent crucial information of the environment or world that can be used as a basis for selecting future actions. The world model typically includes not only the physical state of objects in the environment (including collaborating platforms), but also a degree of internal states, such as the health and intentions of other platforms.

Communication is therefore vital, in order to share information and to allow an effective cooperation on-the-fly, with a mission that can be adapted according the information received by the other robots. Two existing languages for information exchange with AUVs are the Compact Control Language from WHOI ([1]), and the Common Control Language from AUSI ([2]). These provide good support for the compact encoding of core information relating to AUVs, but application-level exchange must use opaque binary payloads. The DELPHIS system ([3]) uses broadcast exchange of status messages for AUVs to share mission state and targets, but this relies on constant repetition of a fixed message, rather than acknowledged delivery of arbitrary content.

This paper presents the topic of a decentralised world model service that operates across multiple underwater vehicles, sitting above the communications data link layer. Figure 1 illustrates how the world model fits in a multi-vehicle system. It presents an abstraction away from data packets and acknowledgements, providing each vehicle with a partially shared world view at the semantic information level. This removes the need for vehicle control systems to explicitly plan speech acts, whilst giving the world model the freedom

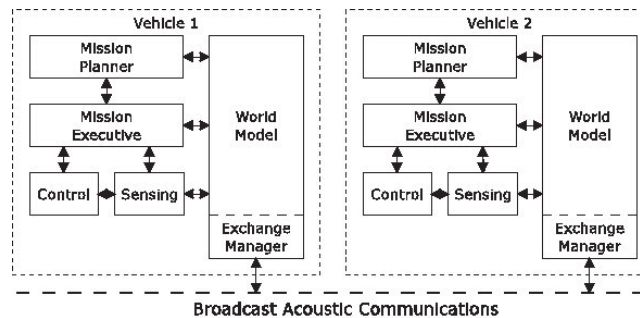


Figure 1: The world model in a simple three-layer robot control architecture

to optimise information exchange across the group of vehicles. The decentralised nature of the system ensures that it is robust to temporary node isolation. We target the most capable underwater communications mechanism, acoustic modems. This paper is organised as follow: Section 2 presents the challenges of acoustic communication and distributed world modeling; Section 3 briefly presents the main blocks that forms the proposed system; Section 4 focuses on the acknowledgement policies; Section 5 presents the results in simulation. Finally, Conclusions and Future Work are outlined.

2 Challenges

The aim of this project is to design and implement a framework for a distributed semantic world model to support cooperation between multiple autonomous vehicles, as outlined in [4]. The system should have the properties given below.

1. Temporal context is incorporated into the world model (lacking in existing systems).
2. Vehicles may exchange information with their peers at different levels of abstraction, significantly increasing on the capabilities of current systems.
3. Selection of information to exchange is performed automatically, with minimal prior input from the vehicle subsystem designers.
4. Resilience to communication failure between individual nodes.
5. No central communications point.
6. Vehicles may still operate in isolation, with reference to their local world model.
7. New vehicles and missions can be incorporated in a simple, modular fashion.

The combination of temporal ontological representation (1) with robustness to communication failure (4,5,6) will be the main novel contribution to the field.

Evaluation of the framework will necessarily involve creating several ontologies to describe the information representing the vehicles under test and the world they inhabit.

Upon creating a list of goals or requirements for a system, it is equally important to list issues that will *not* be addressed, and any assumptions that will be made. Thus, for this project:

1. Communication will be point to point or broadcast, with no facility to route information to hidden nodes.
2. The cooperating vehicles share a common purpose, without conflicting motivations.
3. Existing subsystems from the Ocean Systems Laboratory will be integrated to provide robot control, sensing and planning functionality.

The proposed system, outlined in Fig. 2, is composed by the following modules:

- **World Modeling**

Ontologies allow richer data structure than databases, with the description of hierarchies of classes that can possess both data values, and relations to other classes.

Thus they are the obvious choice for providing structure in a complex world model ([5]). Unlike standard ontologies, we plan to address temporal context and uncertainty linked to the world modelling and the ontology construction.

- **Communication System**

A key part of the architecture is the Data Exchange Manager, which will orchestrate the exchange of information between the local world model for this vehicle, and those of the other vehicles in the collective. Tasks performed by the Data Exchange Manager include the selection of information to send to other vehicles based on utility and communications availability, and the merging of received data into the local world model whilst maintaining consistency.

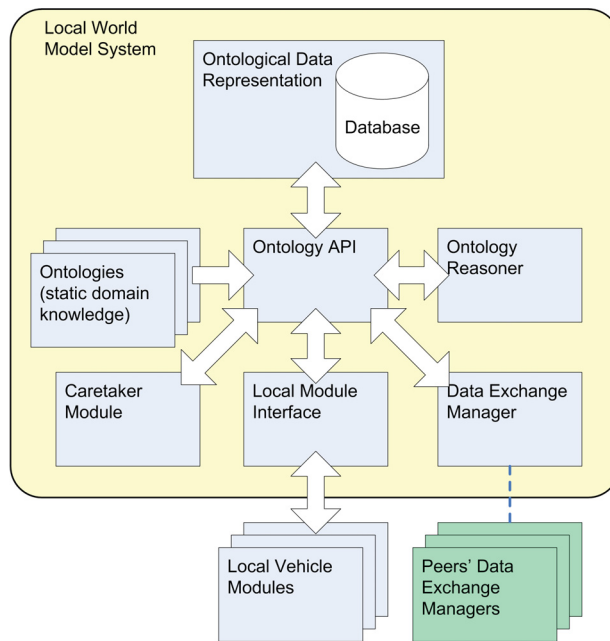


Figure 2: Proposed world model architecture

3 World Modeling and Ontologies

Several ways have been explored in order to represent world data in a connected system, which is able to express relations among different entities. Recently, there has been raised interest in using semantic frameworks, which can provide a hierarchical distributed representation of knowledge for multidisciplinary agent interaction ([6]). They provide a common machine understanding representation of knowledge between embedded agents that is generic and extendible. They also include a reasoning interface for inferring new knowledge from the observed data and knowledge stability by checking for inconsistencies. These frameworks improve local (machine level) and global (system level) situation awareness and context for mission and trajectory behaviour. They can therefore act as enablers for autonomy and on-board decision-making. There are currently several institutions developing standards for knowledge representation under these frameworks. Particular attention is taking the effort describing the concepts and relationships for the domains of unmanned platforms ([6]) and the underwater environment ([7]).

Ontologies are a way of representing data in a structured manner, such that it is easy for both humans and machines to interpret the data contained in them. Conventionally the contents of an ontology are divided into the `TBox` (terminological box) and `ABox` (assertion box), where the `TBox` is equivalent to a class hierarchy in object-oriented programming, and the `ABox` would be a container for all instances of the classes.

The world modelling system proposed can be used with any `TBox` ontology, provided the same ontology is supplied to all platforms running the system. To enable efficient transmission of data, a unique but short UID will be created for every class in the `TBox`, and these UIDs used to instantiate or refer to instances of the classes.

While the `TBox` is fixed, the `ABox` can be supplemented at run-time by recording new observations or objects, and these will be automatically shared between all nodes in the system. Observations should be formatted according to a supplemental `TBox` which defines a compact way of storing data about objects that may change over time. This `TBox` is based on situation awareness ontology work by [8], and defines an `Attribute` class that can be associated with an object of any class. An `Attribute` can represent any property, for example “name” or “longitude”. Rather than storing a single value for an `Attribute`, we allow an `Attribute` to have many `PropertyValues`, where a `PropertyValue` stores both a value and a timestamp (which is taken to be the time the value was observed at). A `PropertyValue` can store either a data value (such as an integer or string) or a link to another object in the `ABox`.

There are widely available and proven tools for building ontologies in languages such as OWL ([9]). Ontology reasoning engines are able to perform logical consistency checking of ontologies, and infer new information based on ontology axioms and rules. They can be key for multi-AUV communication, as the different vehicles exchange values with

references to ontological concepts.

4 Acknowledgement Policies

Acknowledgements are naturally performed at the packet level; packets are either fully received or not received at all. Information contained within a successfully received packet is always added to the local world model, or skipped if it is already present. Therefore, if a packet sent by node A is acknowledged by node B , another node receiving that ACK (either A or C) will know that the ACKing peer now holds the information in the ACKed packet. To make use of this, each node in the system maintains a set of instance UIDs known by each peer.

Three packet acknowledgement policies of increasing complexity are considered below; but first, the problem definition.

4.1 Problem Definition

Consider an N node underwater wireless (acoustic) network with nodes indexed by $j \in \mathbb{Z}^+$, $j \leq N$. Let the probability of packet loss on a link from i to j be p_{ij} . We will treat the acoustic modem as a black box, and assume that any corruption of a received packet will lead to the loss of the entire packet, thus the packet error rate PER is equal to p_{ij} . The acoustic medium is broadcast in nature, and we assume the use of single channel acoustic modems that permit only one node to transmit at once in order for there to be no collisions.

4.2 Policy: Standard ACK

This acknowledgement policy is a straightforward packet ACK applied to the round-robin TDMA schedule. An $(N - 1)$ bit vector is included with every transmitted packet, acknowledging any messages received within the last $(N - 1)$ TDMA slots. The probability of a unsuccessfully acknowledged delivery in the first TDMA slot from node i to node j is $p_{ij} \cdot p_{ji}$. If we consider exchange of a single item of information, and state that automatic retransmissions are performed in the sender's next slot until an acknowledgement is received, the expected number of frames required for delivery and acknowledged delivery follow simple geometric distributions. Where T denotes the number of TDMA frames required:

$$E(T_{delivered}) = \frac{1}{1 - p_{ij}}, \quad E(T_{acked}) = \frac{1}{(1 - p_{ij})(1 - p_{ji})}$$

Now consider the scenario where a single node has the same item of information to send to the $(N - 1)$ other peers in the network. If we assume that the random packet corruption is independent for each receiver, then the expected number of frames until delivery and

acknowledged delivery are the same for any N . Of course, while the number of TDMA frames remains the same, the actual time occupied by each frame increases linearly with the number of slots N when using a fixed slot period.

Where recipients are instructed to retransmit information to other nodes, but only until they believe all interested nodes have taken delivery, an analytical solution is less forthcoming. The solution becomes more complex still when we consider more advanced acknowledgement policies, and such derivations are considered to be outside of the scope of this paper. We thus employ repeated randomised tests to evaluate the policies.

4.3 Policy: M-ACK

Named M-ACK for ‘matrix acknowledgement’, this policy involves each peer transmitting a matrix A_{ij} of $N \times N$ ACK bits with every packet; in practice this can actually be reduced to $N(N - 1)$ bits by eliminating meaningless self-ACKs (the matrix diagonal). The ACK matrix states that node i received the message sent by j before the transmission from i ; the ACKs are relative to the transmission slot of the peer that is said to have received the packet. By using an ACK matrix, nodes are able to repeat ACK bits sent by other nodes, increasing the probability that ACKs for a transmission are seen by the source. To implement this scheme, each node keeps a record of the $(N - 1)$ ACK matrices received from its peers since it last transmitted, as well as the information content of the last two packets transmitted by each peer.

Preparation: Just before the beginning of every TDMA slot k , each peer clears the bits in the ACK matrices it holds where the ACKed peer $j = k$, as well as the entire ACK matrix last received from peer k . Clearing old ACKs is necessary to prevent them from propagating past the point in time at which they are valid.

Transmitting: When node s comes to transmit, it constructs its own ACK matrix by performing a boolean OR operation over the $(N - 1)$ peer ACK matrices it is holding, then replaces the row $i = s$ with its own ACKs for the packets it received directly.

Receiving: On receipt of an ACK matrix, the ACK bits are associated with either the last or second-last packet received from a peer, depending on the relative TDMA slot positions of the ACKing node i and the ACKed node j .

The M-ACK policy has the potential to reduce the amount of redundant information retransmission across the network, by increasing the probability of ACKs propagating back to the information sender. The bandwidth cost of the matrix used by this policy is $O(N^2)$, whereas a simple ACK vector is only $O(N)$. The additional per-packet bandwidth cost of M-ACK versus using a standard vector of ACKs is $(N^2 - 2N)$ bits, assuming the matrix diagonal elements are omitted.

4.4 Policy: MPS-ACK

Named MPS-ACK for ‘matrix pseudo acknowledgement’, this policy is based on M-ACK. However, it adds what we have termed a ‘pseudo ACK’. Suppose that peer j transmits a packet and it is received by peer k . The packet may or may not have been received by peer i , but no acknowledgement to this effect is received by peer k . Under this policy, peer k is able to consult its internal state to determine if peer i already has all the information contained in the packet. If this is the case, peer k is permitted to set the acknowledgement bit A_{ij} – a pseudo ACK – in its next transmission.

This mechanism has the potential to reduce redundant retransmission of information in the network when an intended recipient of a packet has previously received the information, but due to packet loss the genuine acknowledgement would not be seen by the source. Note that MPS-ACK requires that the acknowledgement system is aware of the information content of packets and existing peer knowledge, and would not be possible if packets were considered as opaque items to be acknowledged. There is no bandwidth penalty for implementing this policy, as the MPS-ACK matrix is the same size as that for M-ACK. It will incur an $O(N^2M)$ computation penalty for an N node network, with an average packet capacity of M information instances.

5 Results in simulation

Let the term ‘exchange policy’ describe the combination of acknowledgement policy with the transmission candidate selection scheme. All exchange policies tested here use the transmission selection scheme as a base; some variants allow repeating of information generated by another node. As an initial test of the performance of the different policies, a stepwise iterative simulation was constructed to evaluate the distribution of a single information item from one to $(N - 1)$ other nodes. Boolean variables were used to represent the presence and transfer of the information item, with no actual data transmitted or received. In order to compare the different exchange policies as closely as possible, the same sequence of random packet corruption was applied to all policies, for a given test run; 2000 test runs were performed for each (PER, policy) data point.

Note that this simple test scenario describes an unequal distribution of observations, where only one node is generating. Later tests cover an equal distribution of observations. In the discussions below, we focus on the performance in terms of time to acknowledgement of delivery, rather than time to delivery itself. The reasoning being that until delivery is acknowledged, the information will be retransmitted, wasting bandwidth and slowing delivery of all information on average.

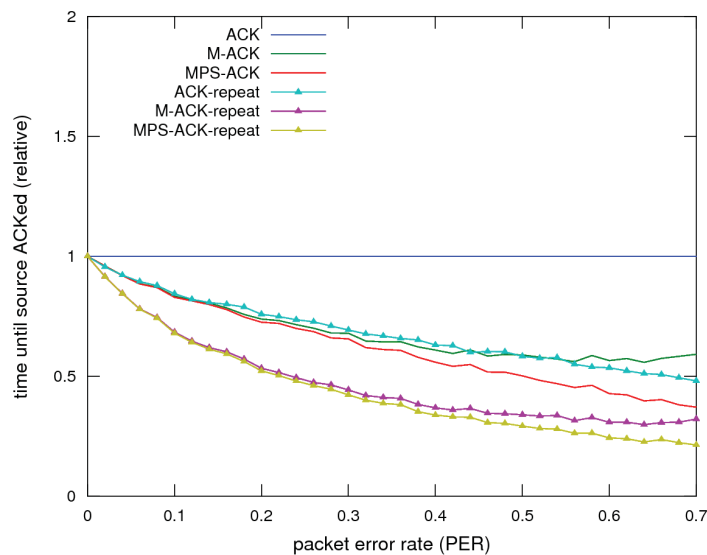


Figure 3: Results in simulation with $N = 5$ and one information item distributed by node 1. Graph shows mean time until information source has confirmed delivery to all nodes, relative to baseline ACK policy (smaller is better). M-ACK-repeat and MPS-ACK-repeat consistently beat the other policies here, but at higher PER, MPS-ACK is not far behind. Baseline ACK policy performs worst. Note that this metric doesn't take account of time required for other nodes to have confirmed delivery, if repeating.

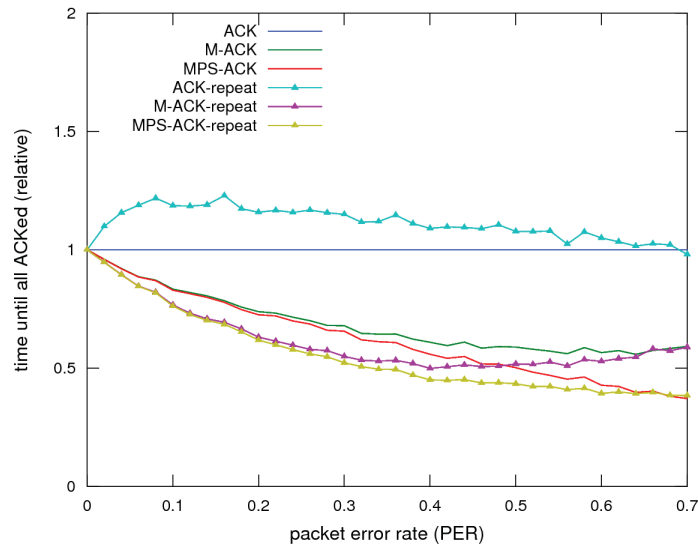


Figure 4: Results in simulation with $N = 5$ and one information item distributed by node 1. The graph shows mean time until all senders (1 or 5, depending on the chosen policy) have confirmed delivery to all other nodes, relative to baseline ACK policy. Naive repeating with ACK-repeat generally performs worse than ACK. Overall, this figure suggests that at lower PER, the best results are achieved by using repeating with either matrix-based policy. However, at higher PER, the benefits of the MPS-ACK policy dominate.

Figures 3 and 4 show results of a five node simulation with one node distributing a single observation. The trends in figure 3 show that while having other nodes repeat the information is beneficial, the extra information provided by the matrix ACKs has a substantial positive effect, even without repeating. At high PER, MPS-ACK slightly outperforms standard ACK-repeat on that metric. However, this plot doesn't show the whole picture, as even after the source is aware of successful delivery to all nodes, repeating nodes may continue to unnecessarily transmit the information.

For the all-node view, we look to figure 4, which presents the time until all senders are aware of successful delivery. Interestingly, with this metric the standard ACK-repeat policy performs worse than the standard ACK policy; it appears that the benefit of repeating information is offset by the requirement for the additional senders to successfully receive acknowledgements. Of course, purely in terms of information delivery, having other nodes repeat the information will increase overall distribution speed, if their transmission slots are otherwise free and there is non-zero packet loss.

Comparing the five node results from figure 4 with ten node results in figure 5, we see similar trends as expected. For brevity, a plot of results for the three node case is not included here. It is very similar to the other two cases, but with the crossing of plots for MPS-ACK and M-ACK-repeat occurring at a much lower PER. From these results, the

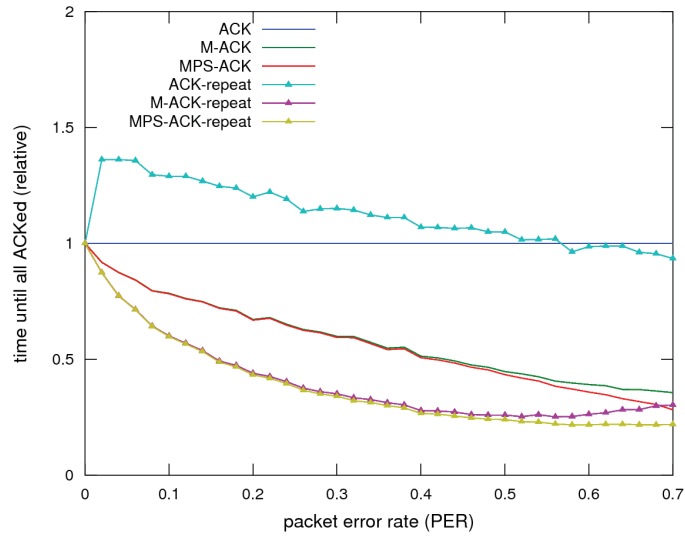


Figure 5: Results in simulation with $N = 10$ and one information item to be distributed by node 1. Graph shows mean time until all senders (1 or 10, depending on the chosen policy) are aware of delivery to all other nodes, relative to baseline ACK policy. Compared to the $N = 5$ test case in figure 4, here there is a slightly more pronounced difference between policies with and without repeating.

strongest performing policy so far appears to be MPS-ACK-repeat.

6 Conclusions and Future Work

This paper has presented a distributed world model system for multi-AUV cooperation, with an analysis in simulation of different TDMA-based exchange policies. The matrix-based acknowledgement policies introduced substantially reduced time to reliable exchange, particularly under high packet loss. The results suggest an adaptive exchange policy may perform best under varying conditions. Future work will address a more realistic information generation scenario. Integration with ROS ([10]) will be key to run the code in the vehicles. The next step will be the use of acoustic modems to test the core principles of the work and soon after that, field trials are foreseen in Scotland, with the AUV fleet of the Ocean Systems Lab.

References

- [1] RP Stokey, LE Freitag, MD Grund, and W.H.O. Instn. A Compact Control Language for AUV acoustic communication. *Oceans 2005-Europe*, 2, 2005.
- [2] C.N. Duarte, G.R. Martel, C. Buzzell, D. Crimmins, R. Komerska, S. Mupparapu, S. Chappell, D.R. Blidberg, and R. Nitzel. A Common Control Language to Support Multiple Cooperating AUVs. In *Proceedings of the Fourteenth International Symposium on Unmanned Untethered Submersible Technology*, 2005.
- [3] Christopher C. Sotzing and David M. Lane. Improving the coordination efficiency of limited-communication multi-autonomous underwater vehicle operations using a multi-agent architecture. *Journal of Field Robotics*, 27(4):412–429, 2010.
- [4] F. Maurelli, J. Cartwright, and D. M. Lane. Control architecture for multiple autonomous unmanned vehicle operations - research proposal, drdc cora cr 2012-100. Technical report, Heriot-Watt University, May 2012.
- [5] N. Guarino. Formal ontology in information systems. In *Proceedings of Formal Ontology in Information Systems*. IOS Press, 1998.
- [6] Emilio Miguelanez, Pedro Patron, Keith E. Brown, Yvan R. Petillot, and David M. Lane. Semantic knowledge-based framework to improve the situation awareness of autonomous underwater vehicles. *IEEE Transactions on Knowledge and Data Engineering*, 23:759–773, 2011.
- [7] National Science Foundation. Marine metadata interoperability. In www.marinemetadata.org, 2004-2012.
- [8] Christopher J. Matheus, Mieczyslaw M. Kokar, and Kenneth Baclawski. A Core Ontology for Situation Awareness. In *Proceedings of the Sixth International Conference on Information Fusion*, pages 545–552, 2003.
- [9] DL McGuinness and F Van Harmelen. Owl web ontology language overview. *W3C recommendation*, 2004.
- [10] M. Quigley, B. Gerkey, K. Conley, J. Faust, T. Foote, J. Leibs, E. Berger, R. Wheeler, and A. Ng. ROS: an open-source Robot Operating System. 2009.

References

- [1] RP Stokey, LE Freitag, MD Grund, and W.H.O. Instn. A Compact Control Language for AUV acoustic communication. *Oceans 2005-Europe*, 2, 2005.
- [2] C.N. Duarte, G.R. Martel, C. Buzzell, D. Crimmins, R. Komerska, S. Mupparapu, S. Chappell, D.R. Blidberg, and R. Nitzel. A Common Control Language to Support Multiple Cooperating AUVs. In *Proceedings of the Fourteenth International Symposium on Unmanned Untethered Submersible Technology*, 2005.
- [3] Christopher C. Sotzing and David M. Lane. Improving the coordination efficiency of limited-communication multi-autonomous underwater vehicle operations using a multiagent architecture. *Journal of Field Robotics*, 27(4):412–429, 2010.
- [4] F. Maurelli, J. Cartwright, and D. M. Lane. Control architecture for multiple autonomous unmanned vehicle operations - research proposal, drdc cora cr 2012-100. Technical report, Heriot-Watt University, May 2012.
- [5] N. Guarino. Formal ontology in information systems. In *Proceedings of Formal Ontology in Information Systems*. IOS Press, 1998.
- [6] Emilio Miguelanez, Pedro Patron, Keith E. Brown, Yvan R. Petillot, and David M. Lane. Semantic knowledge-based framework to improve the situation awareness of autonomous underwater vehicles. *IEEE Transactions on Knowledge and Data Engineering*, 23:759–773, 2011.
- [7] National Science Foundation. Marine metadata interoperability. In *www.marinemetadata.org*, 2004-2012.
- [8] Christopher J. Matheus, Mieczyslaw M. Kokar, and Kenneth Baclawski. A Core Ontology for Situation Awareness. In *Proceedings of the Sixth International Conference on Information Fusion*, pages 545–552, 2003.
- [9] DL McGuinness and F Van Harmelen. Owl web ontology language overview. *W3C recommendation*, 2004.
- [10] M. Quigley, B. Gerkey, K. Conley, J. Faust, T. Foote, J. Leibs, E. Berger, R. Wheeler, and A. Ng. ROS: an open-source Robot Operating System. 2009.

This page intentionally left blank.

DOCUMENT CONTROL DATA

(Security classification of title, body of abstract and indexing annotation must be entered when document is classified)

1. ORIGINATOR (The name and address of the organization preparing the document. Organizations for whom the document was prepared, e.g. Centre sponsoring a contractor's report, or tasking agency, are entered in section 8.) Ocean Systems Lab Department of Electrical, Electronic and Computer Engineering School of Engineering and Physical Sciences Earl Mountbatten Building Heriot-Watt University Riccarton, Edinburgh, EH14 4AS Scotland		2a. SECURITY CLASSIFICATION (Overall security classification of the document including special warning terms if applicable.) UNCLASSIFIED
		2b. CONTROLLED GOODS (NON-CONTROLLED GOODS) DMC A REVIEW: GCEC JUNE 2010
3. TITLE (The complete document title as indicated on the title page. Its classification should be indicated by the appropriate abbreviation (S, C or U) in parentheses after the title.) Control Architecture for Multiple Autonomous Unmanned Vehicle Operations		
4. AUTHORS (Last name, followed by initials – ranks, titles, etc. not to be used.) Maurelli, F.; Saigol, Z.; Cartwright, J.; Lane, D. M.		
5. DATE OF PUBLICATION (Month and year of publication of document.) April 2013	6a. NO. OF PAGES (Total containing information. Include Annexes, Appendices, etc.) 26	6b. NO. OF REFS (Total cited in document.) 20
7. DESCRIPTIVE NOTES (The category of the document, e.g. technical report, technical note or memorandum. If appropriate, enter the type of report, e.g. interim, progress, summary, annual or final. Give the inclusive dates when a specific reporting period is covered.) Contract Report		
8. SPONSORING ACTIVITY (The name of the department project office or laboratory sponsoring the research and development – include address.) Defence R&D Canada – CORA Dept. of National Defence, MGen G. R. Pearkes Bldg., 101 Colonel By Drive, Ottawa ON K1A 0K2, Canada		
9a. PROJECT OR GRANT NO. (If appropriate, the applicable research and development project or grant number under which the document was written. Please specify whether project or grant.) 10bz04	9b. CONTRACT NO. (If appropriate, the applicable number under which the document was written.) W7714-115079/001/SV	
10a. ORIGINATOR'S DOCUMENT NUMBER (The official document number by which the document is identified by the originating activity. This number must be unique to this document.) DRDC CORA CR 2013-066	10b. OTHER DOCUMENT NO(s). (Any other numbers which may be assigned this document either by the originator or by the sponsor.)	
11. DOCUMENT AVAILABILITY (Any limitations on further dissemination of the document, other than those imposed by security classification.) (X) Unlimited distribution () Defence departments and defence contractors; further distribution only as approved () Defence departments and Canadian defence contractors; further distribution only as approved () Government departments and agencies; further distribution only as approved () Defence departments; further distribution only as approved () Other (please specify):		
12. DOCUMENT ANNOUNCEMENT (Any limitation to the bibliographic announcement of this document. This will normally correspond to the Document Availability (11). However, where further distribution (beyond the audience specified in (11)) is possible, a wider announcement audience may be selected.) Unlimited		

13. ABSTRACT (A brief and factual summary of the document. It may also appear elsewhere in the body of the document itself. It is highly desirable that the abstract of classified documents be unclassified. Each paragraph of the abstract shall begin with an indication of the security classification of the information in the paragraph (unless the document itself is unclassified) represented as (S), (C), or (U). It is not necessary to include here abstracts in both official languages unless the text is bilingual.)

The aim of this paper is to present a distributed world model system for multi-robot cooperation. Information is stored in semantic form in an ontology, allowing unlimited new concepts to be added. Automatic exchange of information is driven by the prioritised information needs of each vehicle, and is robust in the face of high latency, low bandwidth, and lossy acoustic communications. The performances of different TDMA-based exchange policies were compared to a standard acknowledgement policy, through tests in simulation. Under certain conditions, particularly high packet loss, the matrix-based acknowledgement policies introduced here substantially reduced time to reliable exchange; the results suggest an adaptive exchange policy may perform best under varying conditions.

14. KEYWORDS, DESCRIPTORS or IDENTIFIERS (Technically meaningful terms or short phrases that characterize a document and could be helpful in cataloguing the document. They should be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location may also be included. If possible keywords should be selected from a published thesaurus. e.g. Thesaurus of Engineering and Scientific Terms (TEST) and that thesaurus identified. If it is not possible to select indexing terms which are Unclassified, the classification of each should be indicated as with the title.)

auv
mission planning
world modelling
ontology
acoustic communication

Defence R&D Canada

Canada's Leader in Defence
and National Security
Science and Technology

R & D pour la défense Canada

Chef de file au Canada en matière
de science et de technologie pour
la défense et la sécurité nationale



www.drdc-rddc.gc.ca

