



Defence Research and
Development Canada

Recherche et développement
pour la défense Canada



HEMi V.2.02 Engagement Simulation (U)

*R. Lestage
DRDC Valcartier*

Defence R&D Canada – Valcartier

Technical Memorandum

DRDC Valcartier TM 2006-180

January 2007

Canada

HEMi V.2.02 Engagement Simulation (U)

R. Lestage
DRDC Valcartier

Defence R&D Canada – Valcartier

Technical Memorandum

DRDC Valcartier TM 2006-180

January 2007

Author

Richard Lestage

Approved by

Robert Stowe
Acting Head/Precision Weapons Section

Approved for release by

Gilles Bérubé
Chief Scientist

© Her Majesty the Queen as represented by the Minister of National Defence, 2007

© Sa majesté la reine, représentée par le ministre de la Défense nationale, 2007

Abstract

The High Energy Missile Technology Demonstrator (HEMi TD) is a project to demonstrate the lethality of a compact hypervelocity kinetic energy missile to provide light armoured vehicles sufficient lethality to destroy a main battle tank. In support of the development of the HEMi concept, analysis of the missile performance has been performed using modeling and simulation of the engagement. A nominal simulation using constant disturbances composed of boost motor thrust misalignment and dart separation effect permitted the evaluation of the nominal kinematics performance of the missile. Then, a Monte Carlo simulation using randomly generated disturbances was used to evaluate the dispersion and probability of hit of the missile. The rocket motor having been designed for a missile mass of 23kg, the actual mass of 25.8kg leads to a maximum velocity of Mach 5.6 while the objective was Mach 6.5. However top speed is obtained at a range of 325m thus achieving a minimum engagement range better than the 400m objective. The Monte Carlo simulation results demonstrate that the hit probability of 95% required by the customer can be achieved for all target ranges. However, the missile model does not account for guidance sensor induced error. It should be expected that modeling the guidance sensor accuracy would increase the missile dispersion at long ranges. Also, further work is required to estimate the probability of kill achieved by the proposed segmented rod.

Résumé

Le démonstrateur de technologie HEMi est un projet visant à démontrer la létalité d'un missile hypervélocité compact à énergie cinétique pouvant fournir à un véhicule blindé léger la létalité suffisante pour détruire un char d'assaut. Pour soutenir le développement du concept HEMi, l'analyse des performances du système a été effectuée en faisant la modélisation et la simulation de l'engagement. Une simulation nominale utilisant des perturbations de l'alignement du vecteur poussé du moteur et de la séparation du dard a permis l'évaluation de la performance nominale de la cinématique du missile. Puis, une simulation de type Monte Carlo employant des perturbations aléatoires a servi à évaluer la dispersion et la probabilité de frappe du missile. Le moteur-fusée ayant été conçu pour une masse de missile de 23 kg, la masse réelle de 25,8 kg amène une vitesse maximum de Mach 5,6 plutôt que l'objectif de Mach 6,5. Cependant, la vitesse maximale est obtenue à une distance de 325 m réalisant de ce fait une distance minimum d'engagement plus courte que l'objectif de 400 m. Les résultats de simulation Monte Carlo démontrent que la probabilité de frappe de 95 % requise par le client est réalisable pour toutes les distances de cible. Cependant, le modèle de missile ne tient pas compte de l'erreur induite par le capteur de guidage. Modéliser l'imprécision des capteurs de guidage augmenterait la dispersion du missile pour de longues portées. En outre, davantage de travail est requis pour estimer la probabilité de destruction obtenue avec la tige segmentée proposée.

This page intentionally left blank.

Executive summary

The High Energy Missile Technology Demonstrator (HEMi TD) is a project to demonstrate the lethality of a compact hypervelocity kinetic energy missile to provide light armoured vehicles sufficient lethality to destroy a main battle tank.

In support of the development of the HEMi concept, analysis of the missile performance has been performed using modeling and simulation of the engagement. For the simulation of system performance, a model was developed. The model allows for parameterization of the system, conduct of simulations using different scenarios, and graphical presentation of the results. The simulation uses six-degrees-of-freedom equations of motion that permits computation of the missile trajectory in three-dimensional space.

A nominal simulation using constant disturbances composed of boost motor thrust misalignment and dart separation effect permitted the evaluation of the nominal kinematics performance of the missile. Then, a Monte Carlo simulation using randomly generated disturbances was used to evaluate the dispersion and probability of hit of the missile.

The rocket motor having been designed for a missile mass of 23kg, the actual mass of 25.8kg leads to a maximum velocity of Mach 5.6 while the objective was Mach 6.5. However top speed is obtained at a range of 325m thus achieving a minimum engagement range shorter than the 400m objective.

The Monte Carlo simulation results demonstrate that the hit probability of 95% required by the customer can be achieved for all target ranges. However, the missile model does not account for guidance sensor induced error. It should be expected that modeling the guidance sensor inaccuracies would increase the missile dispersion at long ranges. Also, further work is required to estimate the probability of kill achieved by the proposed segmented rod.

Lestage, R. 2006. HEMi V.2.02 Engagement Simulation. DRDC Valcartier TM 2006-180, Defence R&D Canada – Valcartier.

Sommaire

Le démonstrateur de technologie HEMi est un projet visant à démontrer la létalité d'un missile hypervélocité compact à énergie cinétique pouvant fournir à un véhicule blindé léger la létalité suffisante pour détruire un char d'assaut.

Pour soutenir le développement du concept HEMi, l'analyse des performances du missile a été exécutée en modélisant et simulant l'engagement. Pour simuler les performances du système, un modèle a été développé. Le modèle permet de paramétrer le système, exécuter les simulations en utilisant différents scénarios, et présenter les résultats sous forme graphique. La simulation emploie des équations 6DOF du mouvement qui permettent le calcul de la trajectoire du missile dans l'espace tridimensionnel.

Une simulation nominale utilisant des perturbations de l'alignement du vecteur poussé du moteur et de la séparation du dard a permis l'évaluation de la performance nominale de la cinématique du missile. Puis, une simulation de type Monte Carlo employant des perturbations aléatoires a servi à évaluer la dispersion et la probabilité de frappe du missile.

Le moteur-fusée ayant été conçu pour une masse de missile de 23 kg, la masse réelle de 25,8 kg amène une vitesse maximum de Mach 5,6 plutôt que l'objectif de Mach 6,5. Cependant, la vitesse maximale est obtenue à une distance de 325 m réalisant de ce fait une distance minimum d'engagement plus courte que l'objectif de 400 m.

Les résultats de simulation Monte Carlo démontrent que la probabilité de frappe de 95 % requise par le client est réalisable pour toutes les distances de cible. Cependant, le modèle de missile ne tient pas compte l'erreur induite par le capteur de guidage. Modéliser l'imprécision des capteurs de guidage augmenterait la dispersion du missile pour de longues portées. En outre, davantage de travail est requis pour estimer la probabilité de destruction obtenue avec la tige segmentée proposée.

Lestage, R. 2006. HEMi V.2.02 Engagement Simulation. DRDC Valcartier TM 2006-180, R&D pour la défense Canada – Valcartier.

Table of contents

Abstract.....	i
Résumé	i
Executive summary.....	iii
Sommaire.....	iv
Table of contents.....	v
List of figures.....	vii
List of tables	vii
1. Introduction.....	1
2. Model Description	2
2.1 Dart Airframe Model.....	2
2.2 Booster Airframe Model.....	3
2.3 Propulsion and Thrust Vector Control Model	4
2.4 Booster Guidance Model.....	5
2.4.1 Guidance law	5
2.4.2 Trajectory shaping.....	7
2.5 Predictive Dart Guidance Model	8
3. Simulation of Nominal Engagement.....	12
3.1 Simulation parameters	12
3.1.1 Missile Initial Condition.....	12
3.1.2 Simulation Environment Model Description.....	13
3.1.3 Motor Thrust Misalignment	13
3.1.4 Separation Effect Model Description	13
3.2 Nominal Engagement Results	14
4. Monte-Carlo Simulation	16
4.1 Simulation Parameters.....	16

4.1.1	Missile Initial Conditions	16
4.1.2	Simulation Environment Model Description.....	17
4.1.3	Motor Thrust Misalignment.....	17
4.1.4	Separation Effect Model Description	17
4.2	Monte-Carlo Simulation Results	18
5.	Conclusion	20
6.	References.....	21
	Annex A.....	23
	List of symbols, abbreviations and acronyms.....	25
	Distribution list	27

List of figures

Figure 1. HEMi V.2.02	1
Figure 2. Thrust curve.....	4
Figure 3. Trajectory shaping commands.....	8
Figure 4. Dart guidance block diagram.....	9
Figure 5. Nominal engagement results	14
Figure 6. Nominal engagement results(2).....	15
Figure 7. Dispersion and probability of hit as a function of target range.	19
Figure 8. Top-level of the engagement model.....	23
Figure 9. Booster subsystem of the engagement model.....	24
Figure 10. Dart subsystem of the engagement model.....	24

List of tables

Table 1. Dart airframe aerodynamic parameters.....	2
Table 2. Dart airframe mass parameters	2
Table 3. Booster airframe aerodynamic parameters	3
Table 4. Booster airframe mass parameters.....	3
Table 5. Thrust table	4
Table 6. Propulsion and TVC parameters.....	5
Table 7. LQR Weight Matrix Values.....	6
Table 8. LQR Gain Values	7
Table 9. Dart predictive guidance parameters	10
Table 10. Dart predictive guidance parameters as a function of step to go.	11

Table 11. Missile Initial Conditions.....	12
Table 12. Simulation environment parameters	13
Table 13. Motor thrust misalignment.....	13
Table 14. Separation effect parameters.....	14
Table 15. Missile Initial Conditions.....	16
Table 16. Simulation environment parameters	17
Table 17. Motor thrust misalignement.....	17
Table 18. Separation effect parameters.....	18
Table 19. Summary of HEMi performances	20

1. Introduction

The High Energy Missile Technology Demonstrator (HEMi TD)[1] is a project to demonstrate the lethality of a compact hypervelocity kinetic energy missile to provide light armoured vehicles sufficient lethality to destroy a main battle tank.

Missile performance requirements [2] [3] call for a missile that reaches a speed of at least Mach 6.5. The missile should be able to engage a target at a minimum range of 400 m. In order to comply with these specifications, the missile uses a solid rocket motor that propels the missile to Mach 6.5 in 400 m. To control the missile, the rocket motor has thrust vector control (TVC) that provides control of thrust direction in order to guide the boosted missile to the target. The separation of a dart occurs and the dart is guided using control flaps.

In order to direct the development of the technology teams of HEMi, modeling and simulation (M&S) plays an important role. M&S assess the performances of the individual technology in a system context where the performance of the missile is evaluated against the above performance requirements.

During the development of the HEMi TD, more than 150 sets of parameters for the model subsystems have been developed and evaluated [4]. This memorandum presents the simulation results for the final version 2.02 of HEMi [5].

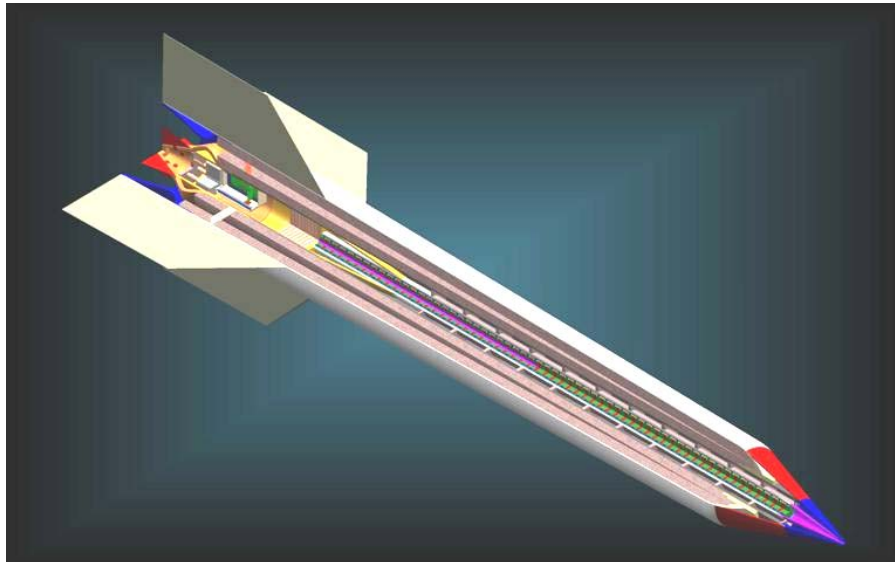


Figure 1. HEMi V.2.02

2. Model Description

For the simulation of system performance, a model was developed using methodology described in [6] and [7]. Based on Matlab/Simulink tools[8], the model allows for parameterization of the system, conduct of simulations using different scenarios, and graphical presentation of the results.

The simulation uses six-degrees-of-freedom equations of motion that permits computation of the missile trajectory in three-dimensional space. Annex A presents block diagrams of the Matlab/Simulink models. The top-level block diagram of the engagement comprises three main elements: a fixed target, the booster simulation and the dart simulation blocks. The components of the booster and dart simulation blocks are described in the following sub-sections.

2.1 Dart Airframe Model

The dart airframe is modelled by six-degrees-of-freedom equations of motion. Aerodynamic forces and moments are computed using linear aerodynamic coefficients expressed in function of the Mach number. The coefficients used, derived from the methods presented in [8] are displayed in Table 1.

The mass, moments of inertia and location of centre of gravity are function of time to accommodate possible variations due the propellant combustion. The parameters used are presented in Table 2 [5].

Table 1. Dart airframe aerodynamic parameters

Reference diameter: 0.030m. Reference position: 0.889m from nose

Mach	Cx	Cna	Cma	Cmq	Cndelta	Cmdelta	Cl	Clp
6	0.2831	10.77	-52.31	-378	0	0	0	-1
7	0.2506	10.60	-49.85	-378	0	0	0	-1
8	0.2255	10.43	-47.56	-378	0	0	0	-1

Table 2. Dart airframe mass parameters

Time [s]	I_{xx} [kg.m ²]	I_{yy} [kg.m ²]	Mass [kg]	CG Position [m] from nose
-1	0.001111	1.2525	6.877	0.889
2	0.001111	1.2525	6.877	0.889

2.2 Booster Airframe Model

The booster airframe is modelled by six-degrees-of-freedom equations of motions. Aerodynamic forces and moments are computed using linear aerodynamic coefficients expressed in function of the Mach number. The coefficients used, derived from the methods presented in [8] are displayed in Table 3.

The mass, moments of inertia and location of centre of gravity are function of time to accommodate variations due the propellant combustion. The parameters used are presented in Table 4 [5].

Table 3. Booster airframe aerodynamic parameters

Reference diameter: 0.050m. Reference position: 0.750m from nose

Mach	Cx	Cna	Cma	Cmq	Cndelta	Cmdelta	Cl	Clp
0.01	2.727	108.44	-459.45	-47544	0	0	0	-847.5
0.5	2.388	109.61	-465.68	-52474	0	0	0	-1010.2
0.7	2.391	108.58	-456.62	-53700	0	0	0	-1062.0
0.75	2.413	108.58	-455.95	-54118	0	0	0	-1076.4
0.77	2.422	108.60	-455.82	-54312	0	0	0	-1082.4
0.8	2.437	108.66	-455.78	-54619	0	0	0	-1091.6
0.85	2.511	108.72	-453.88	-55065	0	0	0	-1098.7
0.9	2.62	108.78	-451.25	-55480	0	0	0	-1105.3
1	4.591	110.87	-439.20	-56660	0	0	0	-1112.9
1.5	3.741	116.36	-509.15	-56881	0	0	0	-1083.1
2	3.056	113.94	-514.26	-62681	0	0	0	-1066.3
2.5	2.596	83.71	-351.43	-55824	0	0	0	-923.3
3	2.219	71.53	-294.97	-54560	0	0	0	-806.7
3.5	1.859	64.00	-247.22	-53752	0	0	0	-714.3
4	1.545	58.95	-204.78	-52756	0	0	0	-644.3
4.5	1.336	55.00	-171.37	-51746	0	0	0	-589.1
5	1.171	51.82	-144.45	-50940	0	0	0	-544.5
6	0.930	46.94	-102.11	-49494	0	0	0	-474.1
7	0.763	43.51	-70.59	-48366	0	0	0	-424.1
8	0.643	43.23	-45.18	-48474	0	0	0	-387.4

Table 4. Booster airframe mass parameters

Time [s]	I_{xx} [kg.m ²]	I_{yy} [kg.m ²]	Mass [kg]	CG Position [m] from nose
0.0	0.06317	2.676	25.77	0.725
0.4	0.01798	1.801	13.04	0.765
3.0	0.01798	1.801	13.04	0.765

2.3 Propulsion and Thrust Vector Control Model

The propulsion and thrust vector control (TVC) model implements a solid rocket motor in the form of a time-thrust curve given by Table 5 and illustrated in Figure 2.

Table 5. Thrust table

Time [s]	Thrust [N]
-1.0	0
0.0	0
0.0	78050
0.4	78050
0.4	0
3.0	0

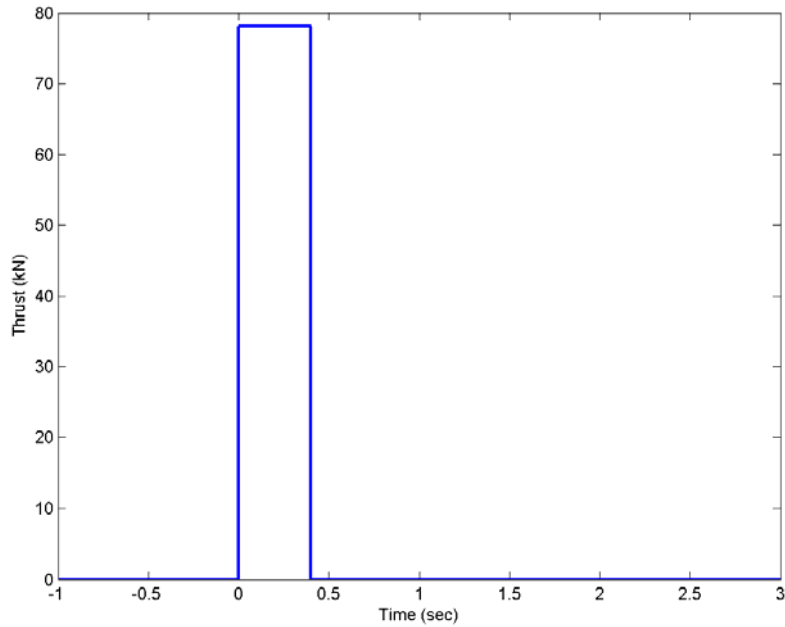


Figure 2. Thrust curve

The total impulse of the rocket motor has been determined using the propellant mass of [5] and assuming a specific impulse of 250 lbf.s/lb. Since missile specifications [1] demand a 0.4 sec. boost time, the maximum thrust has been computed accordingly.

The TVC components allow rotating the thrust vector at the nozzle. The location of the nozzle with respect to the missile nose is used to compute the moment. Parameters used are presented in Table 6 and are derived from [5].

Table 6. Propulsion and TVC parameters

Nozzle exit area (m ²)	0.0178
Nozzle position with respect to nose (m)	1.25
Maximum thrust deflection angle (rad)	0.035

2.4 Booster Guidance Model

The proposed guidance law for the control of the HEMi booster on the guidance beam is based on a linear quadratic regulator (LQR) [10]. This section describes the guidance model based on the LQR regulator and presents trajectory shaping commands use to guide the missile on a super elevated trajectory.

2.4.1 Guidance law

The LQR guidance minimizes the expectancy of objective function J of Equation 1.

$$J = \int_0^{\infty} x^T Q x + \delta^T R \delta dt \quad (1)$$

where

- x is the state vector
- δ is the control command
- Q is the weighting matrix for the state
- R is the weighting matrix for the control command.

The control command δ is given by the following equation:

$$\delta = -K \cdot x \quad (2)$$

where K is chosen to minimize Equation 1.

Based on a linear model, the beam-rider guidance law can be designed. The guidance objective is to maintain the missile on the beam at $Z=0$ using available measurements. The state vector of the linear model is:

$$x = \begin{bmatrix} Z \\ \dot{Z} \\ \theta \\ \dot{\theta} \end{bmatrix} \quad (3)$$

The guidance objective requires minimizing the value of the first state (Z). This leads to a large value for the first value of diagonal of Q . However, we also want the guidance to have minimum oscillations around the beam and we also want to close on the beam with a proper dynamic.

The missile velocity relative to the beam (\dot{Z}) and the missile attitude (θ) are not directly measured but can easily be estimated by differentiation and integration of the measurements:

$$\dot{Z} = \frac{d}{dt} Z \quad (4)$$

$$\theta = \int \dot{\theta} dt \quad (5)$$

Since all states are known, it is possible to implement a state feedback control law.

Chosen weights for matrices Q and R are presented in Table 7. Weights have been adjusted by iteration in order to have the booster reach steady state in 0.4 s with minimum oscillations. This response time of 0.4 s corresponds to the flight time to a range of 400 m, where the missile must have converged on the beam to engage a target.

Table 7. LQR Weight Matrix Values

diag(Q)	1000 1 2 4
R	50000

The state feedback gains obtained for each Mach number are presented in Table 8.

Table 8. LQR Gain Values

Mach	K_Z	$K_{Z\dot{}}$	K_θ	$K_{\theta\dot{}}$
1	-0.14142	-0.0078873	0.61109	0.011412
2.5	-0.14142	-0.0076094	0.52818	0.0086236
5	-0.14142	-0.00546	1.2958	0.0078384
7	-0.14142	-0.0041073	3.066	0.0084064

where the guidance law equation is an expansion of Equation 2:

$$\delta = -K_z \cdot Z - K_{z\dot{}} \cdot \dot{Z} - K_\theta \cdot \theta - K_{\theta\dot{}} \cdot \dot{\theta} \quad (6)$$

or using Equations 4 and 5:

$$\delta = -K_z \cdot Z - K_{z\dot{}} \cdot \frac{d}{dt} Z - K_\theta \cdot \int \dot{\theta} dt - K_{\theta\dot{}} \cdot \dot{\theta} \quad (7)$$

Each gain computed in Table 8 is based on a linear model developed for constant missile mass and velocity. In actual use, the missile will exhibit continuous velocity variations. It thus requires continuous variations in guidance gains. A gain-scheduling method where the applied gains are obtained by a table look-up function of the actual missile velocity is thus required.

2.4.2 Trajectory shaping

Trajectory shaping commands are introduced in the guidance law to control the missile path during the boost phase[1][10].

The commands Z_{CMD} on the position and \dot{Z}_{CMD} on the vertical velocity are added to the guidance law:

$$\delta = -K_z \cdot (Z - Z_{CMD}(t)) - K_{z\dot{}} \cdot \left(\frac{d}{dt} Z - \dot{Z}_{CMD}(t) \right) - K_\theta \cdot \int \dot{\theta} dt - K_{\theta\dot{}} \cdot \dot{\theta} \quad (8)$$

The commands are varied as a function of time to progressively guide the missile onto the beam by the end of the boost phase. Figure 3 presents the trajectory shaping profile.

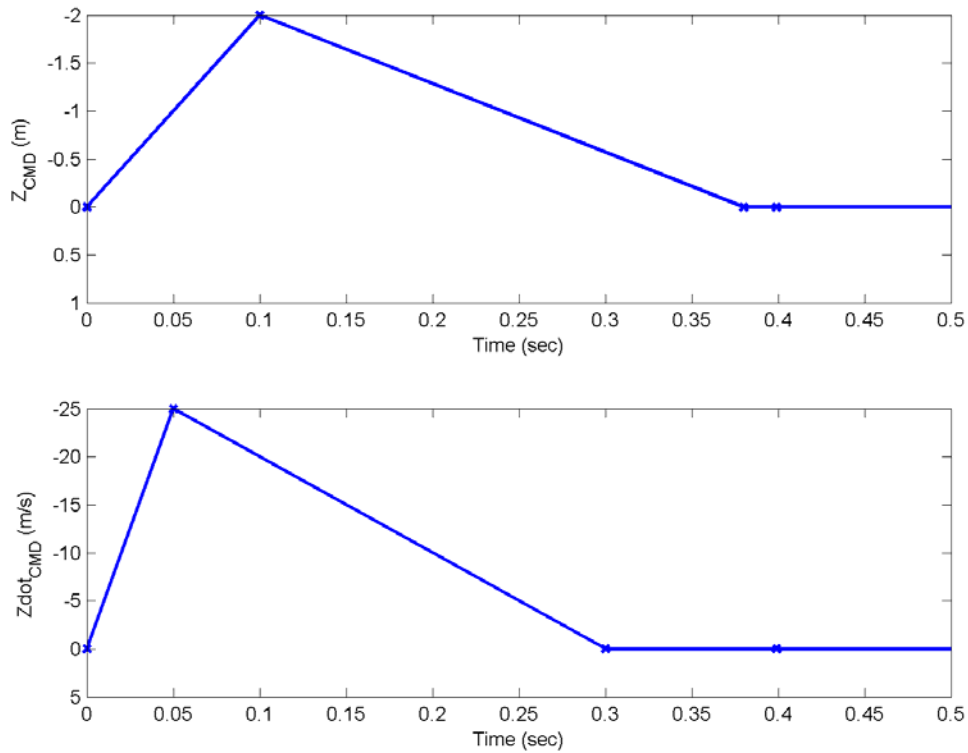


Figure 3. Trajectory shaping commands

2.5 Predictive Dart Guidance Model

The guidance for the HEMi dart is composed of two elements, first a continuous time feedback gain command δ_{AP} and a discrete-time guidance command $\delta_{GUIDANCE}$ as illustrated in Figure 4.

The continuous time feedback gain provides basic damping to the airframe. The guidance is based on a discrete-time prediction of the state of the missile at impact [11] and is thus a discrete-time command.

Since the control effectors is not modeled, the commands are control forces applied directly to the tail of the dart.

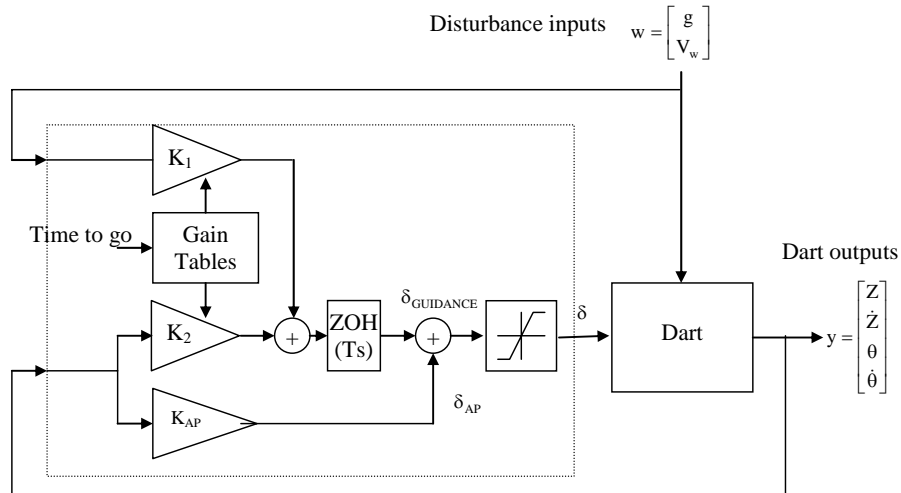


Figure 4. Dart guidance block diagram

The continuous time feedback command applied is:

$$\delta_{AP} = K_{AP} \cdot y \quad (9)$$

Where

$$y = \begin{bmatrix} Z \\ \dot{Z} \\ \theta \\ \dot{\theta} \end{bmatrix} \quad (10)$$

with the following missile measurements:

- $\dot{\theta} = q$ Missile angular pitch rate (rad/s)
- θ Missile angular position (rad)
- \dot{Z} Missile velocity relative to beam (positive down) (m/s)
- Z Missile position relative to beam (positive down) (m)

The discrete-time guidance command uses a gain that is function of the number n of time-step estimated before impact [11]. The gains apply compensations for the missile outputs and the wind and gravity disturbances:

$$\delta_{GUIDANCE} = K_1(n) \cdot y + K_2(n) \cdot w \quad (11)$$

where

$$w(k) = \begin{bmatrix} g(k) \\ V_w(k) \end{bmatrix} \quad (12)$$

with the following anticipated disturbances:

g	Gravity
V_w	Wind velocity

The sum of the commands is truncated to a maximum value δ_{\max} . Parameter values used in the simulation are presented in Table 9. Gains in function the number of time step left are presented in Table 10.

Table 9. Dart predictive guidance parameters

Gravity (m/s ²)	9.81			
Wind velocity (m/s)	0			
$\delta_{\max}(N)$	250			
K_{AP}	-44.721	-13.984	299.06	57.473
Sample time(s)	0.05			

Table 10. Dart predictive guidance parameters as a function of step to go.

Step to go n	$K_1(n)$		$K_2(n)$			
1	-0.40771	-2.8792	-44.721	-14.259	2237.7	-0.97876
2	2.8412	1.0406	590.54	47.852	-1504.7	-54.994
3	2.8161	0.1986	303.13	31.718	-946.28	-34.904
4	2.7188	0.27249	158.97	20.821	-601.61	-22.183
5	2.6139	0.22496	94.693	14.621	-407.04	-15.941
6	2.4188	0.091085	59.758	10.468	-276.96	-11.33
7	2.2583	0.12769	36.906	7.4032	-196.31	-8.1115
8	2.0419	0.055246	23.644	5.3066	-135.76	-5.8312
9	1.8293	0.05625	14.453	3.6883	-93.631	-4.0584
10	1.5999	0.029784	8.7158	2.5362	-62.936	-2.8069
11	1.3691	0.018471	4.9552	1.6859	-41.065	-1.8667
12	1.1419	0.0077948	2.6191	1.0834	-25.903	-1.2058
13	0.92418	-0.001201	1.2269	0.66664	-15.531	-0.74379
14	0.72283	-0.006463	0.44911	0.38792	-8.8125	-0.4349
15	0.54197	-0.010924	0.06526	0.21121	-4.6176	-0.23802
16	0.38502	-0.013085	-0.088217	0.10498	-2.185	-0.11912
17	0.25327	-0.014261	-0.11648	0.046228	-0.88782	-0.053015
18	0.14653	-0.014301	-0.088218	0.017087	-0.2855	-0.019897
19	0.063305	-0.013643	-0.043156	0.0051673	-0.07086	-0.0061363
20	0.0011724	-0.0125	-0.0018309	0.0021726	-0.045134	-0.0024649

3. Simulation of Nominal Engagement

In order to evaluate the kinematics performance of the HEMi missile against its performance specifications [1], a nominal simulation scenario of the missile using deterministic disturbances is performed.

3.1 Simulation parameters

The simulation parameters include the initial conditions of the booster at the exit of the launch tube, the environment parameters, motor thrust misalignment and the effects of the separation of the dart from the booster. In this scenario, deterministic values are used.

3.1.1 Missile Initial Condition

This element of the model defines the initial conditions of the missile at the beginning of the simulation.

The position is in meters. The X,Y and Z axis correspond respectively to the north, east and down directions. Velocities UVW and angular velocities PQR are given in the missile body system of reference. A slight elevation of the pitch Euler angle θ is used.

The parameters used are presented in Table 11.

Table 11. Missile Initial Conditions

Position vector [X,Y,Z] (m)	$\begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$
Velocity vector [U,V,W] (m/s)	$\begin{bmatrix} 5 \\ 0 \\ 0 \end{bmatrix}$
Euler angles $[\psi, \theta, \phi]$ (rad)	$\begin{bmatrix} 0 \\ 0.1745 \\ 0 \end{bmatrix}$
Angular velocity vector [P,Q,R]	$\begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$

3.1.2 Simulation Environment Model Description

The simulation environment model is used to define environment parameters common to the complete simulation. It includes the wind and gravity.

The parameters used are presented in Table 12.

Table 12. Simulation environment parameters

Gravity (m/s ²)	9.81
Wind vector [U,V,W] (m/s)	$\begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$

3.1.3 Motor Thrust Misalignment

The motor thrust misalignment is a representation of the motor-to-motor variation in the orientation of the motor thrust vector. The thrust misalignment induces pitching moment on the airframe. The moment should be compensated by the thrust vector control system and the guidance.

The parameters used are presented in Table 13.

Table 13. Motor thrust misalignment

Yaw thrust misalignment angle (rad)	0
Pitch thrust misalignment angle (rad)	0.01

3.1.4 Separation Effect Model Description

The separation effect model is used to describe disturbances occurring at the separation of the dart from the booster.

Given the condition of the booster/dart assembly before separation, additive offsets are added to obtain the dart initial condition after separation.

The parameters used are presented in Table 14 and are detailed in [12] and [13].

Table 14. Separation effect parameters

Separation induced pitch rate (rad/s)	2.35
Separation induced yaw rate (rad/s)	0

3.2 Nominal Engagement Results

The nominal engagement is simulated with the parameter values of the previous section. The two types of disturbances used here are a thrust misalignment on the booster motor and a dart separation tip-off. Figure 5 presents the trajectories for target ranges of 400m and 5000m. These two target ranges have been selected because they represent the minimum and maximum range requirements. Since all simulated disturbances are in the vertical plan, only results for this plan are presented since no manoeuvre occurs in the horizontal plane.

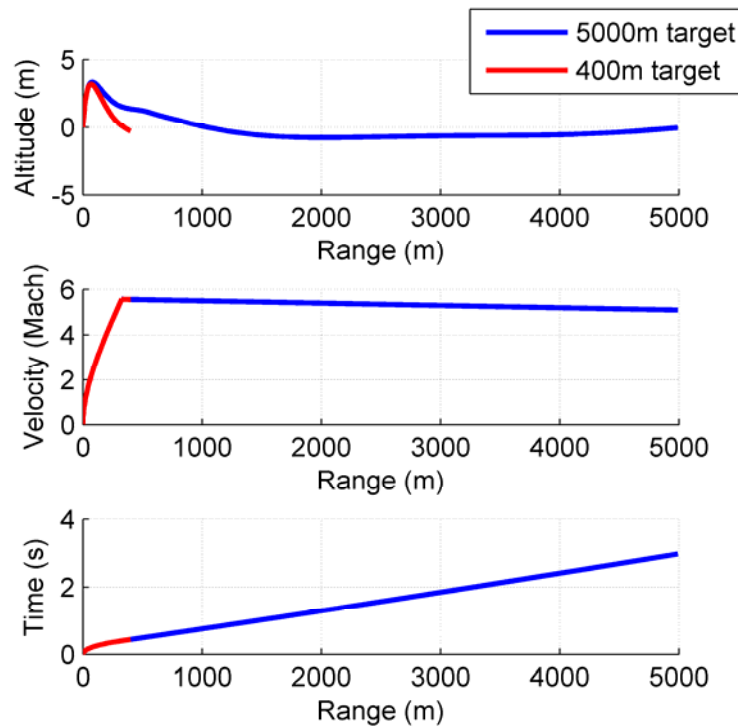


Figure 5. Nominal engagement results

Figure 6 presents the angular information for the same simulations. Results show that maximum velocity is obtained at a range of 325m. Design objective was to attain

400m range in 0.4sec. at Mach 6.5. However, because of its excess weight, the missile reaches a maximum velocity of only Mach 5.6 at 325m in 0.4sec.

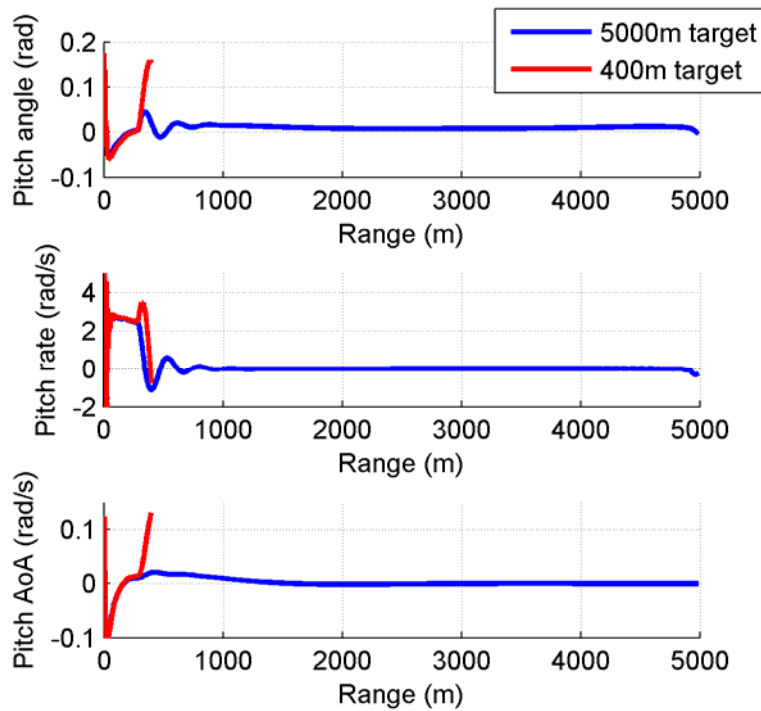


Figure 6. Nominal engagement results(2)

At the end of boost at 325m, the booster is stabilized at a small angle of attack.

For a long range target at 5000m, the dart coasts with minimum corrections. At 5000m, the dart has decelerated to Mach 5.1.

For the simulated cases, the next table present maximum and minimum values for different variables.

4. Monte-Carlo Simulation

In order to compute the dispersion and accuracy performance of HEMi, this section presents the parameters and results of a Monte-Carlo simulation. In a Monte-Carlo simulation, the simulation is run repetitively with parameters selected randomly according to their estimated distribution.

4.1 Simulation Parameters

Simulation parameters used for the simulation are either constant or random. Random parameters are expressed by $N(\mu, \sigma^2)$ which is a random number drawn from a normal distribution with mean μ and variance σ^2 . The Marsaglia's Ziggurat algorithm build in Matlab[8] has been used to generate random numbers.

4.1.1 Missile Initial Conditions

This element of the model defines the initial conditions of the missile at the beginning of the simulation.

The position is in meters. The X,Y and Z axes correspond respectively to the north, east and down directions. Velocities UVW and angular velocities PQR are given in the missile body system of reference. A slight elevation of the pitch Euler angle θ is used.

The parameters used are presented in Table 15.

Table 15. Missile Initial Conditions

Position vector [X,Y,Z] (m)	$\begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$
Velocity vector [U,V,W] (m/s)	$\begin{bmatrix} 5 \\ 0 \\ 0 \end{bmatrix}$
Euler angles $[\psi, \theta, \phi]$ (rad)	$\begin{bmatrix} 0 \\ 0.1745 \\ 0 \end{bmatrix}$

Angular velocity vector [P,Q,R]	$\begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$
---------------------------------	---

4.1.2 Simulation Environment Model Description

The simulation environment model is used to define environment parameters common to the complete simulation. It includes the wind and gravity.

The parameters used are presented in Table 16.

Table 16. Simulation environment parameters

Gravity (m/s ²)	9.81
Wind vector [U,V,W] (m/s)	$\begin{bmatrix} N(0,25) \\ N(0,25) \\ N(0,25) \end{bmatrix}$

4.1.3 Motor Thrust Misalignment

The motor thrust misalignment is a representation of the motor-to-motor variation in the orientation of the motor thrust vector. The thrust misalignment induces pitching moment on the airframe. The moment should be compensated by the thrust vector control system and the guidance.

The parameters used are presented in Table 17.

Table 17. Motor thrust misalignment

Yaw thrust misalignment angle (rad)	N(0,0.000025)
Pitch thrust misalignment angle (rad)	N(0,0.000025)

4.1.4 Separation Effect Model Description

The separation effect model is used to describe disturbances occurring at the separation of the dart from the booster.

Given the condition of the booster/dart assembly before separation, additive offsets are added to obtain the dart initial condition after separation.

The parameters used are presented in Table 18 and are detailed in [12] and [13].

Table 18. Separation effect parameters

Separation induced pitch rate (rad/s)	N(0,1)
Separation induced yaw rate (rad/s)	N(0,1)

4.2 Monte-Carlo Simulation Results

The simulation has been performed for target range varying from 100m to 5000m. For each range, 100 missile simulations have been performed with the parameters defined in the previous section.

Compilation of the simulation results is presented in Figure 7. The first plot presents the 50% and 95% circular error probable (CEP) dispersions. They represent the radius of circular targets that contain respectively 50% and 95% of all missile impacts.

The second plot of Figure 7 presents the probability of hit for a square target of 1m x 1m and a standard NATO target of 2.3m x 2.3m.

Results show that at any range, the missile meets the 95% probability of hit requirements for a standard 2.3m x 2.3m NATO target.

Transient disturbances created by motor thrust misalignments and dart separation effect disturbances slightly decrease the missile accuracy for ranges less than 800m. For long range targets, the dart guidance fully compensates the disturbance and achieves greater accuracy. However, the missile model does not account for guidance sensor induced error [14]. It should be expected that modeling the guidance sensor accuracy would increase the missile dispersion at long range.

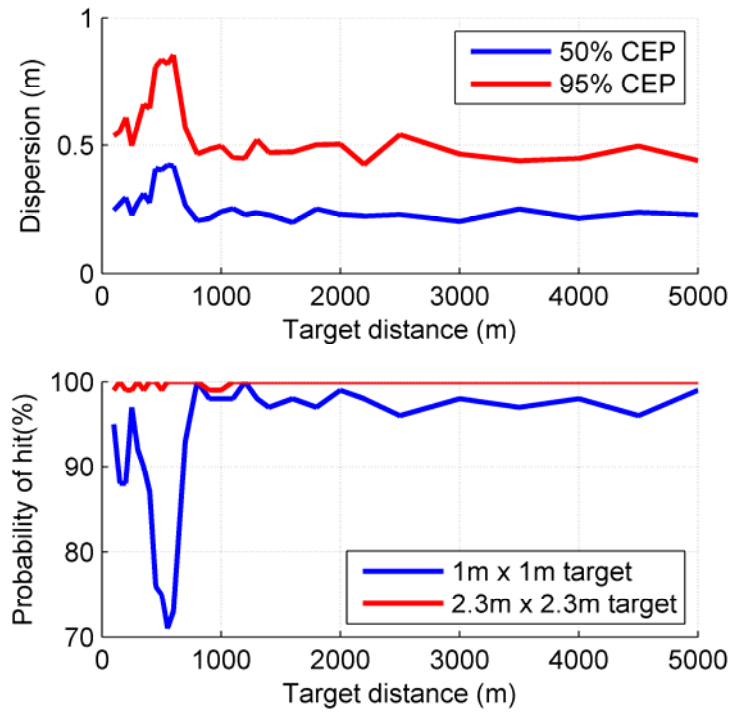


Figure 7. Dispersion and probability of hit as a function of target range.

5. Conclusion

In support of the development of the HEMi concept, analysis of the missile performance has been performed using modeling and simulation of the engagement.

A nominal simulation using constant disturbances composed of boost motor thrust misalignments and dart separation effects permitted the evaluation of the nominal kinematics performance of the missile.

Then, Monte Carlo simulations using randomly generated disturbances were used to evaluate the dispersion and probability of hit of the missile.

Table 19 presents a summary of the achieved HEMi missile performance by comparison with the design objective from the missile system level specifications [2][3].

Table 19. Summary of HEMi performances

Characteristic	Objective	Achieved
Mass (kg)	23	25.8
Length (m)	1.25	1.264
Minimum range(m)	400	325
Maximum range(m)	5000	5000+
Top speed (Mach)	6.5	5.6
Flight time to 5000m (sec)	2.4	3.0
Hit probability (400-5000m, 2.3x2.3m stationary target)	95%	95+%

The rocket motor having been design for a missile mass of 23kg, the actual mass of 25.8kg leads to a maximum velocity of Mach 5.6 while the objective was Mach 6.5. However top speed is obtained at a range of 325m thus achieving a minimum engagement range shorter than the 400m objective.

The Monte Carlo simulations result demonstrate that a hit probability of at least 95% can be achieved for all target range. However, the missile model does not account for guidance sensor induced error [14]. It should be expected that modeling the guidance sensor inaccuracies would increase the missile dispersion at long range. Also, further work is required to estimate the probability of kill of the proposed segmented rod [15].

6. References

1. "Project Implementation Plan, High Energy Missile Technology Demonstration (HEMi TD) – Phase I, Version 1.5", May 2001.
2. Lestage, R., J. Dubois, P. Lafrance, F. Wong, F. Lesage, "HEMi Missile System Level Specifications V.2.01", Technical Note, DRDC Valcartier TN 2003-200, 16 p., December 2003.
3. Maj. P. J. Wells, "High Energy Missile Technology Demonstrator (HEMi TD) Draft Statement of Operational Requirement (SOR)", Appendix C of "HEMi TD Integration Meeting, DREV, 27 Feb. – 2 Mar. 2001, SUMMARY OF MEETING" prepared by F. Lesage, DRDC/DSTL 3, 27 march 2001.
4. Lestage, R., "Résultats préliminaires de l'études des configurations HEMi", Note technique, DRDC Valcartier TN 2003-199, 7 p. and 1 CD-ROM, October 2003.
5. Paradis, B., Cinq-Mars, A., "High Energy Missile (HEMi) Version 2.02", Drawing Number A/02041906-2.01, DRDC Valcartier, June 2004.
6. Lauzon, M., R. Lestage, C. Lalancette and A. Jeffrey, "An Integrated Modeling and Simulation Capability for Weapon Engagement Analysis", AIAA paper 2001-4120, AIAA Modeling and Simulation Technologies Conference, August 6-9, 2001, Montreal, Canada. 11 p.
7. Daigle, S., "Gestion de modèles, paramètres, résultats et analyses pour la modélisation et la simulation de HEMi", Nurun, Rapport de Contrat W7701-1-3259 et W7701-4-2529, RDDC Valcartier CR 2005-060, 12 p., Avril 2005.
8. The Mathworks, Inc., "Getting Started with MATLAB, version 7", http://www.mathworks.com/access/helpdesk/help/pdf_doc/matlab/getstart.pdf, 2006.
9. Lesage, F., Hamel, N., "Sizing of the initial HEMi missile concept using semi-empirical aerodynamic analysis", Technical Memorandum, DRDC Valcartier TM 2003-140, 50 p., December 2003.
10. Lestage, R., "Sensor and actuator requirements for HEMi booster guidance", Technical Memorandum, DRDC Valcartier TM 2004-440, 47 p., January 2006.
11. Lestage, R., "Predictive integrated beam-rider guidance", Technical Note, DRDC Valcartier TN 2003-025, 22 p., October 2003.
12. Lesage, F., Lestage, R., "A numerical analysis of the axial separation of the HEMi missile dart from the booster", Technical Memorandum, DRDC Valcartier TM 2005-076, 52 p., October 2006.

13. Parisé, N., Lestage, R., Lesage, "Experimental Testing and Numerical Simulation of Separation Disturbances for Two Stage Kinetic Energy Missiles", 22nd International Symposium on Ballistics, November 14-18, 2005, Vancouver, BC, Canada, 8 pages.
14. Roy, G.; Dubois, J.; Bissonnette, L., "On Missile Guiding Via Atmospheric Aerosol Scattering", Technical Memorandum, DRDC Valcartier TM 2003-036, 38 p., July 2003.
15. Nandlall, D.; Sidhu, R., "A numerical analysis of the penetration mechanics of segmented rod projectiles", Technical Memorandum, DRDC Valcartier TM 2001-208, 46 p., April 2001.

Annex A

Block diagrams of the Matlab/Simulink models.

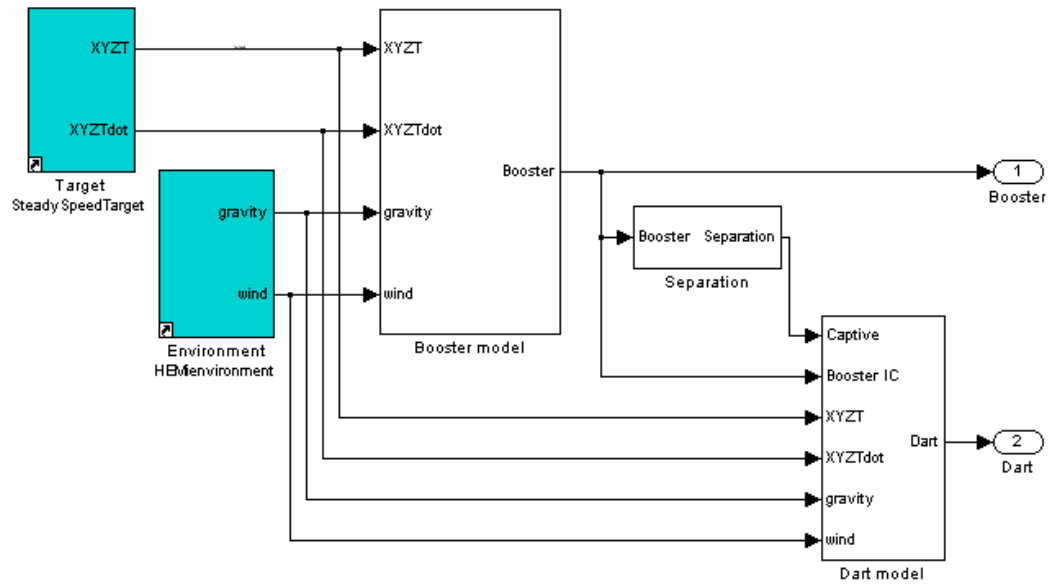


Figure 8. Top-level of the engagement model

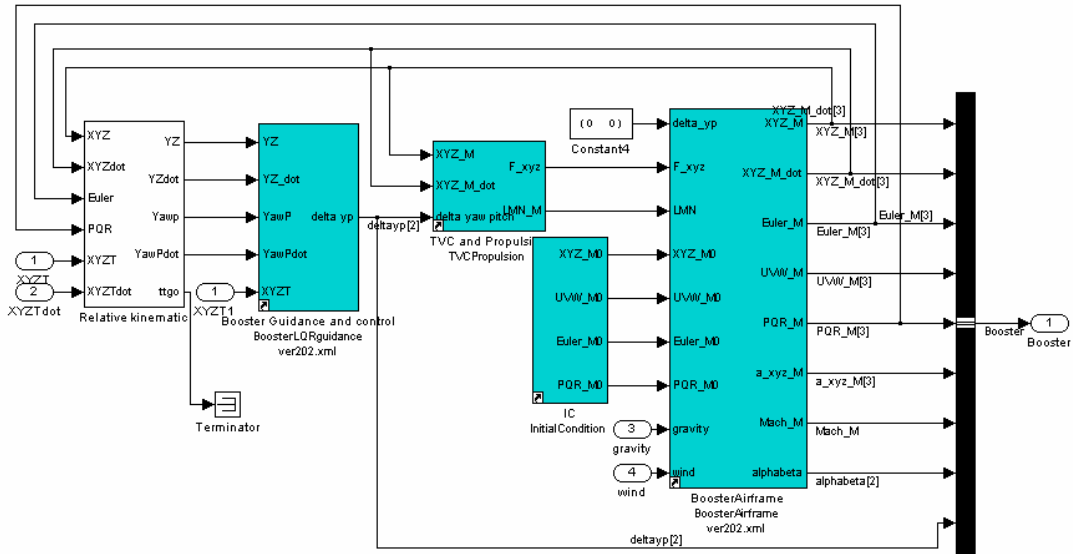


Figure 9. Booster subsystem of the engagement model

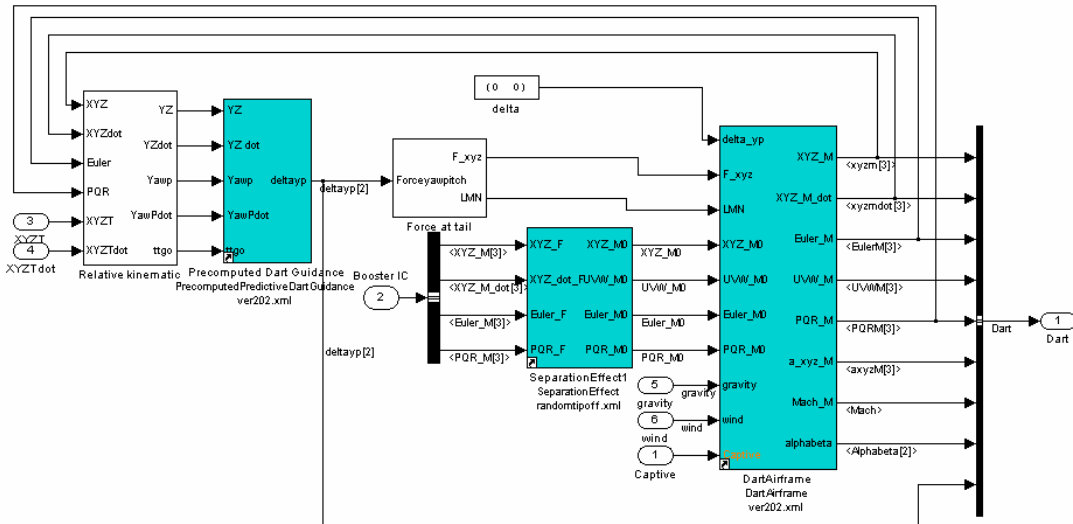


Figure 10. Dart subsystem of the engagement model

List of symbols, abbreviations and acronyms

δ	Control command
$[\psi, \theta, \phi]$	Euler angles
AoA	Angle of attack
CEP	Circular error probable
CG	Centre of gravity
Cl	Roll moment coefficient
Clp	Roll damping coefficient
Cma	Pitching moment coefficient
Cmdelta	Yaw moment control effectors coefficient
Cmq	Pitch damping coefficient
Cna	Lift coefficient
Cndelta	Yaw moment control effectors coefficient
Cx	Axial drag coefficient
DND	Department of National Defence
g	Gravity
HEMi TD	High Energy Missile Technology Demonstrator
I_{xx}	Polar moment of inertia for x-axis
I_{yy}	Polar moment of inertia for y-axis
J	Optimization objective function
K	Guidance gain

$N(\mu, \sigma^2)$	Random number draw from a normal distribution with mean μ and variance σ^2
NATO	North Atlantic Treaty Organisation
[P,Q,R]	Angular velocity vector
Q	Weighting matrix for the state
R	Weighting matrix for the control command.
[U,V,W]	Velocity vector
TVC	Thrust vector control
V_w	Wind velocity
[X,Y,Z]	Position vector
x	State vector

Distribution list

Internal Distribution

- 1- Director General
- 1- H/Precision Weapons Section
- 3- Document Library
- 1- R. Lestage (author)
- 1- J. Dubois
- 1- P. Lafrance
- 1- M. Lauzon
- 1- F. Lesage
- 1- F. Wong

External Distribution

- 1- Director Research and Development Knowledge and Information Management
(PDF file)
- 1- Director Science and Technology Land
Defence R&D Canada
305 Rideau Street
Ottawa, Ontario, K1A 0K2
- 1- Director Science and Technology Land 2
Defence R&D Canada
305 Rideau Street
Ottawa, Ontario, K1A 0K2
- 1- Director Land Requirements
Department of National Defence
101 Colonel By Drive
Ottawa, Ontario, Canada
K1A 0K2
- 1- Director Land Requirements 3-3
Department of National Defence
101 Colonel By Drive
Ottawa, Ontario, Canada
K1A 0K2

UNCLASSIFIED
SECURITY CLASSIFICATION OF FORM
(Highest Classification of Title, Abstract, Keywords)

DOCUMENT CONTROL DATA		
1. ORIGINATOR (name and address) DRDC Valcartier	2. SECURITY CLASSIFICATION (Including special warning terms if applicable) UNCLASSIFIED	
3. TITLE (Its classification should be indicated by the appropriate abbreviation (S, C, R or U)) (U)HEMi V.2.02 Engagement Simulation		
4. AUTHORS (Last name, first name, middle initial. If military, show rank, e.g. Doe, Maj. John E.) Lestage, Richard		
5. DATE OF PUBLICATION (month and year) January 2007	6a. NO. OF PAGES 37	6b. NO. OF REFERENCES 15
7. DESCRIPTIVE NOTES (the category of the document, e.g. technical report, technical note or memorandum. Give the inclusive dates when a specific reporting period is covered.) Technical Memorandum		
8. SPONSORING ACTIVITY (name and address)		
9a. PROJECT OR GRANT NO. (Please specify whether project or grant) 12np12	9b. CONTRACT NO.	
10a. ORIGINATOR'S DOCUMENT NUMBER DRCD Valcartier TM 2006-180	10b. OTHER DOCUMENT NOS N/A	
11. DOCUMENT AVAILABILITY (any limitations on further dissemination of the document, other than those imposed by security classification)		
<input checked="" type="checkbox"/> Unlimited distribution <input type="checkbox"/> Restricted to contractors in approved countries (specify) <input type="checkbox"/> Restricted to Canadian contractors (with need-to-know) <input type="checkbox"/> Restricted to Government (with need-to-know) <input type="checkbox"/> Restricted to Defense departments <input type="checkbox"/> Others		
12. DOCUMENT ANNOUNCEMENT (any limitation to the bibliographic announcement of this document. This will normally correspond to the Document Availability (11). However, where further distribution (beyond the audience specified in 11) is possible, a wider announcement audience may be selected.) Unlimited		

UNCLASSIFIED
SECURITY CLASSIFICATION OF FORM
(Highest Classification of Title, Abstract, Keywords)

UNCLASSIFIED
SECURITY CLASSIFICATION OF FORM
(Highest Classification of Title, Abstract, Keywords)

13. ABSTRACT (a brief and factual summary of the document. It may also appear elsewhere in the body of the document itself. It is highly desirable that the abstract of classified documents be unclassified. Each paragraph of the abstract shall begin with an indication of the security classification of the information in the paragraph (unless the document itself is unclassified) represented as (S), (C), (R), or (U). It is not necessary to include here abstracts in both official languages unless the text is bilingual).

The High Energy Missile Technology Demonstrator (HEMi TD) is a project to demonstrate the lethality of a compact hypervelocity kinetic energy missile to provide light armoured vehicles sufficient lethality to destroy a main battle tank. In support of the development of the HEMi concept, analysis of the missile performance has been performed using modeling and simulation of the engagement. A nominal simulation using constant disturbances composed of boost motor thrust misalignment and dart separation effect permitted the evaluation of the nominal kinematics performance of the missile. Then, a Monte Carlo simulation using randomly generated disturbances was used to evaluate the dispersion and probability of hit of the missile. The rocket motor having been designed for a missile mass of 23kg, the actual mass of 25.8kg leads to a maximum velocity of Mach 5.6 while the objective was Mach 6.5. However top speed is obtained at a range of 325m thus achieving a minimum engagement range better than the 400m objective. The Monte Carlo simulation results demonstrate that the hit probability of 95% required by the customer can be achieved for all target ranges. However, the missile model does not account for guidance sensor induced error. It should be expected that modeling the guidance sensor accuracy would increase the missile dispersion at long ranges. Also, further work is required to estimate the probability of kill achieved by the proposed segmented rod.

14. KEYWORDS, DESCRIPTORS or IDENTIFIERS (technically meaningful terms or short phrases that characterize a document and could be helpful in cataloguing the document. They should be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location may also be included. If possible keywords should be selected from a published thesaurus, e.g. Thesaurus of Engineering and Scientific Terms (TEST) and that thesaurus-identified. If it is not possible to select indexing terms which are Unclassified, the classification of each should be indicated as with the title.)

missile
model
guidance
Monte-Carlo
HEMi
Simulation

UNCLASSIFIED
SECURITY CLASSIFICATION OF FORM
(Highest Classification of Title, Abstract, Keywords)

Defence R&D Canada

Canada's Leader in Defence
and National Security
Science and Technology

R & D pour la défense Canada

Chef de file au Canada en matière
de science et de technologie pour
la défense et la sécurité nationale



WWW.drdc-rddc.gc.ca

