

Image Cover Sheet

CA010513

CLASSIFICATION

UNCLASSIFIED

SYSTEM NUMBER

515380



TITLE

Theseus AUV - two record breaking missions

System Number:

Patron Number:

Requester:

Notes:

DSIS Use only:

Deliver to:

This page is left blank

This page is left blank

DREA/

Theseus AUV—Two Record Breaking Missions

Designed to Lay Fiber-Optic Cable from a Site Near the Shore of Ellesmere Island to a Scientific Acoustic Array in the Arctic Ocean

By James Ferguson
Vice President


Allan Pope
Program Manager
International Submarine
Engineering Ltd.
Port Coquitlam, British Columbia,
Canada

Bruce Butler
System Engineering Consultant
Offshore Systems Ltd.
Vancouver, British Columbia,
Canada

and

Dr. Ronald I. Verrall
Defence Scientist
Defence Research Establishment
Atlantic
Halifax, Nova Scotia, Canada

Since 1992, International Submarine Engineering (ISE) and the Defence Research Establishment Atlantic (DREA) of the Canadian Department of National Defence have worked together to develop a large AUV for laying fiber-optic cables in ice covered waters. The vehicle, named Theseus, was designed to lay up to 220 kilometers of fiber-optic cable from a site near the shore of Ellesmere Island in the Canadian Arctic islands to a scien-

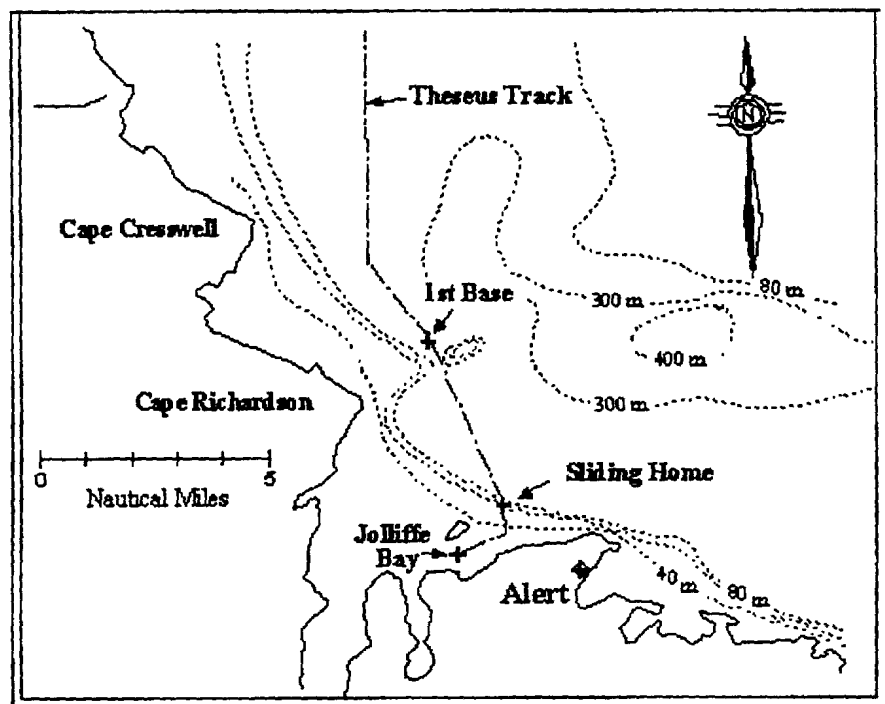


At left is *Theseus* AUV Layout. Above map shows track of the *Theseus* AUV under the Arctic icecap at the end of a mission.

Technology (April 1995). Following this, Arctic trials and two record breaking missions were conducted under ice from Ellesmere Island.

Vehicle Design Objectives

Both the environment and the complexity of the mission imposed severe constraints on the vehicle design. In the operating area the ocean is completely ice covered, mostly by multi-year ice 3.5 to 10 meters thick, with ice keels that can extend to depths of 30 meters within 10 kilometers from the launch site, and 50 meters further

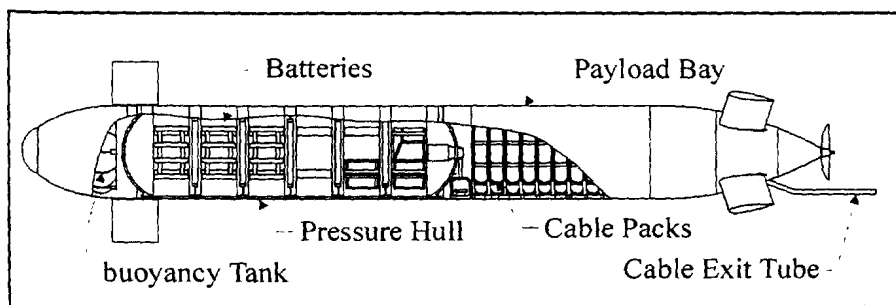

out; water currents vary from 0 to 25 cm/sec near the launch site and 0 to 10 cm/sec at the array site; air temperatures vary from -40° to -20°C; and water temperatures vary from -1°C in the shallow waters near the launch site to +4°C near the bottom at a depth of 600 meters.

An endurance of 450 kilometers was required to lay the cable, return to the launch site and allow a reasonable margin for contingencies. A navigational accuracy of 1 percent of distance traveled combined with an

acoustic terminal homing system was needed to bring the vehicle through a 200 meters wide cable recovery loop at the cable delivery site. To minimize the amount of cable in the water column, the AUV was required to follow the bottom at an altitude of 20 to 50 meters.

The vehicle is 10.8 meters in length and has a diameter of 1.28 meters. It's large size is driven entirely by the volume and buoyancy requirements of 16 fiber-optic cable payload. With the full payload of 220 kilometers of cable,

the weight of the vehicle is 8,600 kilograms. At a speed of 3.7 knots (desurvey speed) it's range is 920 kilometers. As a prelude to the description of the Theseus mission, major components of the vehicle's guidance and control system are outlined below

Computer Control System

Overall vehicle operation is managed by an MC68030 computer running a real time executive kernel that was developed by ISE research for AUV control. The executive is implemented in C++ in an object-oriented fashion with a layered architecture.

One of the fundamental characteristics of the executive is the ability to reconfigure the control system without modifying source code. The concept of "scripts," which are collections of tasks (sequencing components) organized into one or more steps, was developed. Each step in a script may contain any number of "threads" of tasks. Scripts are English-like statements that can be organized by non-programmers to reconfigure the system for a desired sequence of events.

Scripts can be developed to run in parallel at different priority levels, and have many useful operators. The highest level script is the mission plan, a series of mission steps that instruct the vehicle to go from one waypoint to the next—specifying en route conditions such as depth/altitude, speed, and fault response.

In order to increase the tolerance to system faults, the control system manages fault responses using a predefined fault table. This table allows the user to divide a mission into any number of phases, where a phase consists of one or more maneuvers between waypoints. Each phase of a mission script has its own series of responses to each of the vehicle faults, a response is either: stop up under the ice, stop down to the sea bed, change to another mission step, or ignore the fault. Therefore, a change of phase occurs when the desired response to some fault changes, such as when approaching a manned camp. At this point a new series of entries in the fault table takes effect. Eighteen phases were used to adjust to the changing circumstances during the 1996 Arctic missions.

Navigation System

Designing a navigation system to allow an AUV to navigate autonomously under ice for more than

Bringing Connections

SEA CON
 1720 North Way
 E. Salem, OR 97301 USA
 Tel: 503-582-4771
 Fax: 503-582-4708
 seacon@seacon.com
 http://www.seacon.com


SEA CON
 18201 Wilshire Blvd, Suite 1056
 Los Angeles, CA 90024 USA
 Tel: 310-274-1880
 Fax: 310-274-2276

Latest product:
CM HydraStar

450 kilometers is a challenge. The presence of a permanent ice cover requires that all sensors used to determine position must be located below the ice cover but not necessarily on board the vehicle. The chosen solution for navigation was to use an onboard, medium-accuracy positioning system for transits, and an external terminal-guidance acoustic positioning system for cable delivery and vehicle recovery.

Theseus monitors its position by dead reckoning. It uses a Honeywell 726 ring-laser-gyro INU and an EDO 3050 Doppler sonar. The INU provides heading and attitude data, while the Doppler sonar measures forward and lateral ground speeds, as well as altitude. This combination was selected to provide positions with an error of less than 1% of the distance traveled.

The vehicle is fitted with a Sonatech model STA-013-1 forward-looking obstacle avoidance sonar system. This sonar operates at 200 and 230 kHz and projects 20 beams in a 4 x 5 array that covers the region ± 9 vertical and ± 25

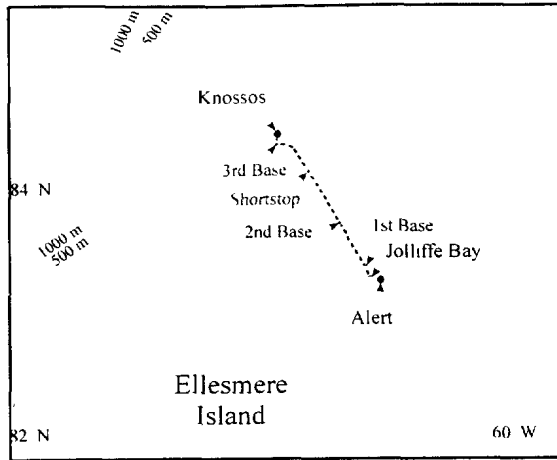

Theseus launch and recovery site—Ellesmere Island.

horizontal out to a range of 180 meters. A control system allows the vehicle to autonomously steer over, under or around obstacles.

The cable is stored on a series of spools that are stacked longitudinally along the vehicle. The ends of each spool are spliced to adjacent spool ends prior to launch. The cable winds off the spools from the inside out, and exits through a tube in the stern. A deployment peel tension of 2 kilograms is maintained through the use of a special adhesive applied to the cable jacket during the spool winding process. To keep the system simple, no active tensioning or dispensing devices are used.


As cable leaves the vehicle, weight is lost. To prevent this from affecting trim, loss in weight is counteracted by an automatic buoyancy compensation system. Surrounding each cable spool is a toroidal hard ballast tank that is filled with water as the cable is dispensed from its spool. This keeps the buoyancy of each spool assembly near neutral. Metallic tabs at the end of each cable spool signal the vehicle control computer as each pack is emptied.

Arctic Trials

Arctic trials were carried out in April 1995, in shallow ice-covered water near Ellesmere Island. The objectives were to verify launch and recovery procedures, test vehicle systems in an under-ice environment, and refine techniques for delivering the fiber-optic cable to the ice surface.

Four dives were carried out with the longest being 5 kilometers. The cable deployment system worked well, just as it had in the south, and the on-ice cable recovery system was successful.

When it's all about getting the right signal

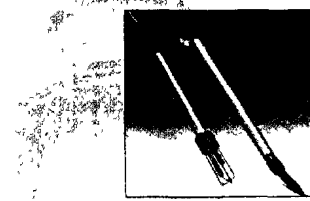

HMS 1820-CTD Sound Velocity Profiler

Features of the HMS 1820-CTD

- Sound velocity and CTD
- Shallow water to ocean depth
- Free fall profiling
- Easy calibration
- Interface to Multibeam and single beam systems
- Robust, stainless steel nose
- Compact and lightweight
- "Smart winch" available

Your partner for complete survey packages



MARIMATECH

Marimatech AS
Samsøvej 30 DK-8382 Hinnerup Aarhus, Denmark
Phone +45 - 86 91 22 55 Telefax +45 - 86 91 22 88
e-mail mail@marimatech.com www.marimatech.com

CIRCLE NO. 106 ON INQUIRY CARD

CARIS
Marine Information Systems

The CARIS Commitment

CARIS offers collection, management, and production of data within specifications, on-time, and within budget. Better - Cheaper - Faster.

From A to Z...

A full range of marine information systems.

Tools and suites for:

- multi and single beam processing
- side scan processing
- paper chart production
- raster chart production
- raster to vector conversion
- ENC/S-57 data production and quality control tools
- ENC integration tools
- Port and harbor management software
- Data distribution and updating software

Get on Board with the Industry Standard

For over twenty years CARIS has been setting the standards for the hydrographic and marine industries. Over forty nations and numerous marine organizations, from around the world, have chosen CARIS for processing and producing the data necessary to ensure safe navigation.

Visit our web site at
www.universal.ca/sea
or call us at
1.800.567.5005



World Headquarters
Universal Systems Ltd.
Fredericton, NB Canada Fax: 506 459.3849
Email: info@universal.ca

European Office
CARIS B.V.
The Netherlands Fax: +31(0)413.296.012
Email: sales@caris.nl

CIRCLE NO 53 ON INQUIRY CARD

The Unpredictable Mistress

by Harris Stewart



This is a fascinating book. It is the first one to chronicle the exciting career of an oceanographer. In a series of autobiographical anecdotes, the reader visits - among other places - the North and South Pacific, Atlantic, and Indian oceans, the Persian Gulf, the Gulf of Alaska, the Malacca Straits, the Bay of Bengal, and the South China and Caribbean seas.

The book covers underwater mapping by SCUBA-diving geologists, encounters with killer whales, sharks, and squid, and dredging up manganese nodules from the bottom of the sea. Undersea mountains and deep oceanic trenches are explored, and the unfathomable depths of the federal bureaucracy are successfully plumbed. Most of the at-sea incidents relate to the author's time with the U.S. Navy Hydrographic Office, the Scripps Institution of Oceanography, the U.S. Coast and Geodetic Survey, and the National Oceanic and Atmospheric Administration.

This well written book reflects Dr. Stewart's obvious love of the sea as well as his delightful sense of humor.

**Dr. Robert R. Lankford, Retired Geological Oceanographer
University of Puerto Rico, Mayaguez, P.R.**

This intriguing book should be required reading for anyone with an interest in the sea, a love of travel and adventure, and the appreciation of good tales well told. I recommend it highly.

**Rear Admiral William L. Stubblefield
National Oceanic and Atmospheric Administration
Washington, D.C.**

This book is respectfully dedicated to the oceanographers of yesterday and today but especially to those men and women who will continue our work as the oceanographers of tomorrow.

To order *The Unpredictable Mistress* (240 pp.), send \$19.95 plus \$3.50 s/h (U.S.) or \$10.00 s/h (outside the U.S.—surface mail) to

Best Publishing Company
c/o Compass Publications, Inc.
1117 N. 19th Street, Suite 1000
Arlington, VA 22209

• • *contact Compass Publications, Inc. if special handling is required* • • •
(703) 524-3136 • Fax (703) 841-0852 • e-mail: oceanbiz@sea-technology.com

PAYMENT METHOD:

Check or money order enclosed (*make payable to Best Publishing Co.*)

Charge to my credit card

MasterCard



Visa



Discover



Signature _____

Credit Card Number _____

Expiration Date (month/year) _____

Company _____

Name _____

Address _____

City/State/Zip or Postal Code _____

Country _____

Phone _____ Fax _____

ly tested. A 9-kilometers length of fiber-optic cable was left on the ocean bottom until April 1996 to provide some information on long-term survivability.

Following this first Arctic trial, the vehicle controller software was completed between June 1995 and January 1996 and the Ag-Zn battery banks were commissioned. The next trials were carried out at the Canadian Forces Maritime Experimental Test Range in Georgia Strait during January 1996. Here, a full mission-length trial was carried out to verify the endurance of the vehicle, to test the power budget, and the navigational accuracy.

Theseus ran a total distance of 360 kilometers over 51 hours without stopping. An extra 18 kilometers on previous trials brought the total distance that was traveled on the battery to 378 kilometers that used a total of 145 kWh. Since approximately 360 kWh was available from one charge, the energy margin was more than adequate.

Theseus' navigation was checked by comparing its position, as determined by the range, with its calculated position. On the first leg the vehicle's cross-track error was 0.45% of the distance traveled (bearing error of 0.26°) and its along-track error was about 0.5%. This was much better than had been expected. At the start of the next leg, a heading error correction was sent to the vehicle over the acoustic telemetry link. This correction had the effect of rotating (in software) the heading of the Doppler sonar relative to the INU. After this correction was applied, the navigational accuracy was exceptional; the average cross-track error was of the order 0.05% of the distance traveled (bearing error of 0.03°).

The vehicle's ability to home to a beacon and do an automatic position update were tested on the final five round trips. The homing system worked very well to a range of 5 kilometers, and the position update procedure worked flawlessly.

Cable Laying Missions

In April 1996, a fiber-optic cable was laid from Jolliffe Bay (just west of CFS Alert) to ice camp Knossos, a one way distance of 175 kilometers. At this time of year, the Arctic Ocean is completely ice-covered. Theseus was deployed through ice that was 1.7 meters thick and the fiber-optic cable

was delivered to an ice camp where the ice was 2.7 meters thick. The launch and recovery procedures and the technique of catching the cable at the ice camp are sufficiently different to be discussed separately.

Theseus was launched through a large (2.0 x 13 meters) ice hole made by cutting 0.9 x 1.5 x 1.7 meters thick ice blocks with a hot water slot cutter.

The ice hole was located at Jolliffe Bay in a large (11 x 20 meters) heated tent that housed the vehicle and served as a maintenance shop. Two traveling gantries with 5,450 kilograms rated hoists were erected inside the tent to handle Theseus and to hoist the ice blocks (2,000 kilograms) out of the water.

When Theseus returned after a mission, it parked itself on the bottom or up under the ice within tethered vehicle range of the large hole. A Phantom DHD2+2 ROV was used to attach a recovery line to Theseus that was then pulled to the recovery hole.

When Theseus arrived at Knossos it delivered the cable by flying through a loop suspended from the ice surface. This loop was in the shape of an equilateral triangle, 200 meters on the side, and it consisted basically of two ropes and a saddle-shaped weight. After the vehicle passed through the triangle, the cable sank to the saddle at the bottom of the triangle. The saddle was then pulled to the surface and the cable recovered. However, before it could be cut and spliced to the array cable, it was necessary to allow for ice motion during the splicing period of about two hours. To compensate for cable that might be pulled away by ice motion, one extra kilometer was pulled up onto the ice.

Cable-Laying Run



The mission consisted of navigating from Jolliffe Bay to the array site via 35 waypoints. Acoustic beacons were located at six locations—sliding home, first base, second base, shortstop, third base, and Knossos. First base and second base were manned in order to make acoustic telemetry contact in case the vehicle encountered problems.

The mission began at 00:22 on April 17. Theseus passed first base at 02:20 and second base at 11:12, with successful homing and acoustic telemetry contact at both. Shortstop was passed at 19:00 without successful homing but continued on to third base as programmed. Later investigation revealed that the shortstop beacon was not functioning. At 01:18, April 18, Theseus arrived at third base, homed to the transponder there and continued on to catcher, located about 1.6 kilometers away. Homing was good at first, but deteriorated as Theseus approached the catchment loop. As a result, the decision was made to fly Theseus through the loop under shore-based pilot control through the cable telemetry system.

A surface-based tracking system at Knossos provided position information via voice radio to the pilot who was located in the Theseus control room at Alert. Under human pilotage, Theseus successfully flew through the loop and parked under the ice some 600 meters away. The cable settled to the saddle at the bottom of the catchment loop and was recovered.

Theseus was given a final position update through the cable, and the cable was cut. Theseus returned to Jolliffe via homing beacons at shortstop (a new beacon was not in place), second base, first base and sliding home. At first base, the homing step failed to complete, possibly due to poor acoustic conditions. In this situation, the fault manag-

NOVA SCOTIA SLIP RINGS

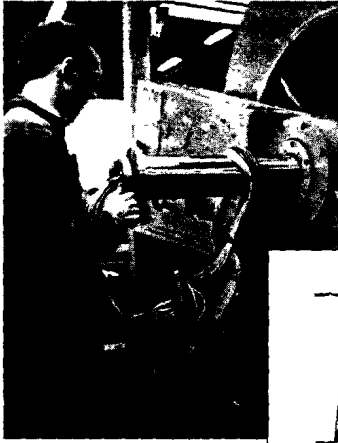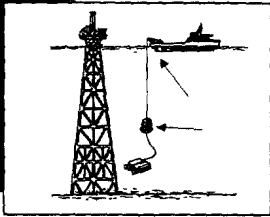Electro-Optical Rotary Joints

- Combination units - fibre optic, fluid and electrical
- ISO 9000 quality, two-year warranty
- Passive, reliable, field-proven
- Singlemode or multimode optical fibre
- Explosion-proof, pressure-compensated

FOCAL

Focal Technologies Inc.
 1-800-361-2263 (US)
 1-888-302-2263 (Canada)
 Tel: (902) 468-2263
 Fax: (902) 468-2249
 e-mail: info@focaltech.ns.ca
 website: www.focaltech.ns.ca

CIRCLE NO 54 ON INQUIRY CARD

There's a lot going *on line* at ROS...



www.rosys.com

Now featuring our new
**Computer Controlled
 Video System**



ROS
 REMOTE OCEAN SYSTEMS

5618 Copley Drive * San Diego CA 92111
 (619) 565-8500 West Coast Office (804) 754-3936 East Coast Office


CIRCLE NO 55 ON INQUIRY CARD

Oceanographic Instruments

in corrosion-free plastic enclosures

Seamon® mini

Temperature recorder

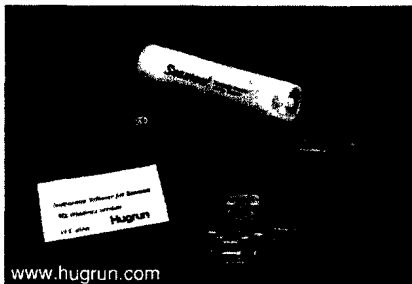

www.hugrun.com

Seamon® CTD

Conductivity, temperature & depth recorder

Seamon CTD for salinity measurements



www.hugrun.com


Seamon® TD

Temperature & depth recorder



www.hugrun.com

Graphics software for Windows 95

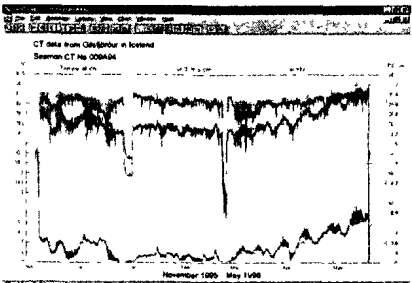

Hugrun

Data acquisition in demanding environments

Hugrun Scientific Instruments AS,
Hansteensgate 5, N-0253 Oslo, Norway
tel +47-2313 1400, fax +47-2313 1401
email sales@hugrun.com

internet web site
<http://www.hugrun.com/>

CIRCLE NO. 56 ON INQUIRY CARD

er had been programmed to have Theseus stop and park under the ice to await further instructions. Acoustic telemetry and surface tracking were established, and the vehicle's health was checked and it was sent on its way. At 11:40 (April 19) Theseus came to a stop under the ice at the launch hole, lines were attached, and it was recovered.

As Theseus passed by the acoustic beacons at second base and third base, it made corrections to its own position. From these corrections it is possible to determine navigational accuracy. When Theseus arrived at third base, its overall cross-track error was 0.5% of the distance traveled, and its along-track error was 0.4%. A new heading-error correction was calculated for the return trip in order to reduce the cross-track error. Nothing was done for the along-track error since it was not deemed to be important.

With the new correction, the cross-track error on the return was 0.04% of the distance traveled. The along-track error was 0.5% (essentially the same as before). During this mission the energy used was 149 kWh (less than half of the estimated battery capacity)

Following this success, it was decided to lay a backup cable to a second site; slightly closer in, the run distance was 160 kilometers each way. Some risk was associated with this; the adhesive in some of the cable packs was known to have settled to the bottom during the drying process and there was a concern that it might have hardened to the point where it would cause a cable break.

This concern proved justified at 117 kilometers, when the cable did in fact break. Theseus carried on, however, passing through the saddle and back to the recovery site. While a cable was not successfully laid, the vehicle did what it was programmed to do and it completed a 320 kilometer under ice transit. In terms of AUV operations, this indeed was a success.

Other Uses

Other Arctic cable laying missions are being considered for the future. The vehicle is currently configured solely for cable laying; however, its modularity makes it suitable for other missions. The fiberglass payload bay can be modified or replaced to accommodate other payloads. These factors combined with Theseus' qualities of covertness, endurance, and navigational precision make possible such

tasks as long range route surveys, remote minehunting, the rapid deployment of surveillance systems (acoustic and non-acoustic), and the towing of mobile sensor arrays. Missions of over 1,000 kilometers can be accommodated by replacing the current silver-zinc batteries with fuel cells or other air independent propulsion (AIP) power plants. /st/

James Ferguson joined ISE in 1981 following 17 years service as an officer in the Canadian Navy. He is currently responsible for AUV programs. These include the Dolphin semisubmersible, ARCS and Theseus, as well as Aurora, a low-cost scientific AUV.


Allan Pope has been with ISE since 1992. Prior to that time, he was involved in the manufacture of Class Eight, highway, and off-road trucks. He is currently program manager for the Theseus and ARCS AUVs.

Bruce Butler is a system engineering consultant associated with the Theseus project since its inception.


Dr. Ronald I Verrall received his physics education at the University of Manitoba and McGill. Verrall has spent most of his career working on defence-related under ice acoustics research in the high arctic.

GIANNINI INSTITUTE

SUBMERSIBLE HERMETIC SWITCHES



- Stainless Steel
- Built to Military/NAVSEA Specifications
- No "O" Rings or gaskets
- Performance Guaranteed

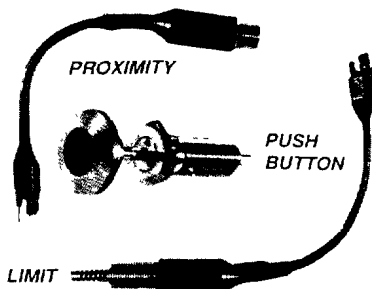

Giannini Petro-Marine Products
51555 Madison Street La Quinta, CA 92253
VOICE (760)347-2833 • FAX (760)342-4006



CIRCLE NO. 57 ON INQUIRY CARD

515380

CA010513