



Defence Research and
Development Canada

Recherche et développement
pour la défense Canada



LP/SV Bladder Buoyancy Test Comparison

*Bill Martell
DRDC Toronto*

*Ryan Wolter
Canadian Forces Environment Medicine Establishment*

The information contained herein is proprietary to Her Majesty and is provided to the recipient on the understanding that it will be used for information and evaluation purposes only. Any commercial use including use for manufacture is prohibited.

Defence R&D Canada
Technical Note
DRDC Toronto TN 2011-116
July 2011

Canada

LP/SV Bladder Buoyancy Test Comparison

Bill Martell
DRDC Toronto

Ryan Wolter
Canadian Forces Environment Medicine Establishment

Defence R&D Canada – Toronto

Technical Note

DRDC Toronto TN 2011-116

July 2011

Principal Author

Original signed by Bill Martell

Bill Martell

Life Support Systems Technologist Joint Operational Human Sciences Centre

Approved by

Original signed by LCol Simon Gowan

LCol Simon Gowan

Acting Section Head, Joint Operational Human Sciences Centre

Approved for release by

Original signed by Dr. Stergios Stergiopolous

Dr. Stergios Stergiopolous

Acting Chair, Knowledge and Information Management Committee

Acting Chief Scientist

© Her Majesty the Queen in Right of Canada, as represented by the Minister of National Defence, 2011

© Sa Majesté la Reine (en droit du Canada), telle que représentée par le ministre de la Défense nationale, 2011

Abstract

Background: The buoyancy of CF jet aircrew LP/SV is unknown and may not provide the minimum 35 lbs that is required. The buoyant force of the British MK 30 LCX is also unknown; however, this flotation device utilizes a large bladder and may replace the LP/SV. Aim: The aim of this experiment was to calculate and compare the buoyant force of the CF LP/SV and the British MK 30 LCX. Methods: Bladders were inflated using either a 35g or a 45g CO₂ canister. A Chatillon spring scale was used to measure the buoyant force following submersion. Results: The LP/SV and MK 30 LCX attained buoyant forces of 41 and 42 lbs respectively following inflation using a 35g CO₂ canister, and 45 and 53 lbs respectively following inflation using a 45g CO₂ canister. Conclusion: In all trials, both flotation devices produced buoyant forces greater than 35 lbs. The British MK 30 LCX produced larger buoyancy forces.

This page intentionally left blank.

Table of contents

Abstract	i
Table of contents	iii
List of figures	iv
List of tables	iv
1 LP/SV BLADDER BUOYANCY TEST COMPARSION	1
1.1 BACKGROUND	1
1.2 AIM	1
1.3 METHOD	1
1.4 RESULTS	3
1.5 DISCUSSION	3
1.6 CONCLUSION	4
Annex A Pictures During Buoyancy Test	5
Annex B Sample Calculations	11
References	12
List of symbols/abbreviations/acronyms/initialisms	13
Distribution list	14

List of figures

Figure 1 Determining Submersed Weight of 45lb Plate.....	5
Figure 2 CF Jet Aircrew LP/SV Bladder Attached to One 45lb and One 10 lb Plate That Are Acting to Counter The Buoyant Force. (35g CO ₂ canister test).....	6
Figure 3 Chatillon Type 100 Spring Scale Measurement Intervals.....	7
Figure 4 British MK 30 LCX Bladder Buoyancy Test using 35g CO ₂ canister. Note that the hand in the photo was not producing any force in the vertical direction, it was simply ensuring that the connecting rope remained hooked on the spring scale.	8
Figure 5 CF Jet Aircrew LP/SV Bladder using a 45g CO ₂ canister.	9
Figure 6 Buoyancy Test of CF Jet Aircrew LP/SV Bladder using 45g CO ₂ canister.....	10

List of tables

Table 1: Experimental Observations	3
Table 2: Bladder Buoyant Force.....	3

1 LP/SV BLADDER BUOYANCY TEST COMPARSION

1.1 BACKGROUND

1. Past experiments with the Jet Aircrew LP/SV bladder yielded a consensus that the LP/SV's were not providing sufficient buoyancy for aircrew when submersed in water. Also, nowhere in the current LP/SV regulations does it state the actual buoyant force that the LP/SV can provide given a particular sized CO₂ canister.
2. The British use a very similar aircrew flotation device called the MK 30 LCX. It differs from the currently used LP/SV because it utilizes a larger bladder with greater overall surface area and volume. This British MK 30 LCX has the potential to replace the CF's current LP/SV.
3. The minimum required buoyant force is 35lbs

1.2 AIM

4. The aim of this experiment is to calculate and compare the buoyancy of the CF's LP/SV with the British's MK 30 LCX using two different CO₂ canisters, one of 35g, and the other of 45g.

1.3 METHOD

5. The experiment took place in the rear of Building 54 located at DRDC Toronto, Ontario on 10 May 2011 (see Annex A for pictures during testing). There were four personnel administering the experiment. The two bladders that were being tested were the CF's Jet Aircrew LP/SV bladder and the British MK 30 LCX bladder. Both bladders underwent two main tests. The first test fitted a 35g CO₂ canister and the second test fitted at 45g CO₂ canister to the bladders. The equipment used during the experiment is as follows:

- a) 1 CF Jet Aircrew LP/SV Bladder, NSN: 4220-20-000-5621
- b) 1 RFD Beaufort MK 30 LCX Bladder, NSN: 4220-99-549-6844
- c) 2 35g CO₂ cartridge, NSN: 4220-21-903-1991
- d) 2 45g CO₂ cartridge, NSN: 4220-41-000-4259
- e) 1 3.5' x 2.0' x 2.0' plastic container
- f) 1 Chatillon Type 100 Spring Scale
- g) 1 45lb weight
- h) 2 10lb weight

- i) 1 Dorie H50 Digital Thermometer
- j) 1 Water Hose
- k) 1 Roll Nylon Paracord
- l) 1 10' rope

6. The experiment was conducted using the following procedure:

- a. Experiment Preparation: The plastic container was filled with cold fresh water to a level approximately one inch below the top of the container. This is to ensure that neither the weights nor the LP/SV bladder come in contact with the bottom of the plastic container resulting in inaccurate data. Next, the spring scale was fitted to a location directly above plastic container and was held in place by the 10' rope which was used to raise or lower the spring scale in order to fully submerge the LP/SV bladder.
- b. Ballast and Dry Weight Determination: Both the CF and the British bladders were weighed to determine their dry weights. Then, the 45lb and 10lb weights were submerged in the water and weighed to determine their resulting buoyant force.
- c. CF LP/SV Bladder Buoyancy Test: The CF LP/SV Jet Aircrew Bladder was attached to one 45lb weight using paracord. Then it was attached/hung to the end of the spring scale. The 35g CO₂ canister was then opened and the bladder inflated. Using the 10ft rope, the weights and inflated bladder were lowered into the water. If the bladder remained afloat, the bladder and weights were raised out of the water and fitted with a 10lb weight and lowered again. This process continued until the bladder became fully submerged. Once the scale stopped fluctuating, the value was recorded. The bladder was then deflated and fitted with a 45g CO₂ canister and the test was repeated.
- d. British MK 30 LCX Bladder Buoyancy Test: The CF LP/SV Bladder was removed from the spring scale and the British MK 30 LCX Bladder was fixed to the spring scale and followed the same process as 6.c above.
- e. Clean Up: The weights, bladder and spring scale were removed from the plastic container and left to dry. The plastic container was then drained and returned to its original location.

1.4 RESULTS

7. The observations/controls are represented in the following table:

Table 1: Experimental Observations

Water Temperature	7.8°C (280.3°K)
CF Jet Aircrew LP/SV Bladder Dry Weight	2.0 lbs
British MK 30 LCX Bladder Dry Weight	2.0 lbs
45lb Plate Submersed Weight	38 lbs
10lb Plate Submersed Weight	9.0 lbs

8. Using the above table, the actual buoyant force of the two bladders was calculated and is illustrated in the following table:

Table 2: Bladder Buoyant Force

Bladder Type	35g CO2 canister	45g CO2 canister
CF Jet Aircrew LP/SV Bladder	41 lbs	45 lbs
British MK 30 LCX Bladder	42 lbs	53 lbs

9. Sample calculations with regards to Table 2 are located in Annex B.

1.5 DISCUSSION

10. Firstly, the method used to administer this test was fairly basic, requiring simple tools such as the spring scale and various ballast weights. The fact that this test used such basic equipment results in potential inaccuracies in the results. Some areas where these inaccuracies could have occurred were during the lowering of the bladder/weights into the water. The manual lowering of the bladder caused the spring scale to oscillate and resulted in a slight difficulty in reading off the value. Another potential inaccuracy is due to the fact that the spring scale has minimum intervals of one pound. This limits the accuracy of the experiment. Finally, another potential cause for

inaccuracy is the fact that the scale value is read off simply by ones vision as opposed to a digital readout.

11. Secondly, the test was administered using fresh water at a temperature of approximately 8°C. Assuming a worst case scenario, an LP/SV will be used during the winter months, so a water temperature of 0°C would have produced more valuable results. Also, the probability that an LP/SV will be used in fresh water as opposed to salt water is low, so this test would also produce more valuable results if salt water was used. The main reason behind this is the fact that the density of fresh water at 0°C is 999.9kg/m³ and the density of salt water at 0°C is 1025kg/m³. The higher density of salt water results in an object of constant volume to produce a slightly larger buoyant force. Therefore the actual buoyant force of each bladder will be slightly higher in salt water assuming the same CO₂ canister is being used.

1.6 CONCLUSION

12. In conclusion, since this experiment was done to produce a fairly accurate estimate on the buoyancy of the CF Jet Aircrew LP/SV bladder versus the British MK 30 LCX bladder, the need for a digital scale readout or higher accuracy scale is unnecessary. Also, since the density of fresh water has almost zero change when comparing 8°C and 0°C, the results obtained are reasonably accurate. Lastly, since this test should be administered under a worst-case scenario, and noting that fresh water produces slightly less buoyant force than salt water, it is acceptable that this tests was done using fresh water. In the end, both models produced a buoyant force greater than 35lbs, however the British MK 30 LCX bladder produced larger buoyant forces using both the 35g CO₂ canister and the 45g CO₂ canister.

Annex A Pictures During Buoyancy Test



Figure 1 Determining Submersed Weight of 45lb Plate



Figure 2 CF Jet Aircrew LP/SV Bladder Attached to One 45lb and One 10 lb Plate That Are Acting to Counter The Buoyant Force. (35g CO₂ canister test)



Figure 3 Chatillon Type 100 Spring Scale Measurement Intervals



Figure 4 British MK 30 LCX Bladder Buoyancy Test using 35g CO₂ canister. Note that the hand in the photo was not producing any force in the vertical direction, it was simply ensuring that the connecting rope remained hooked on the spring scale.



Figure 5 CF Jet Aircrew LP/SV Bladder using a 45g CO₂ canister.

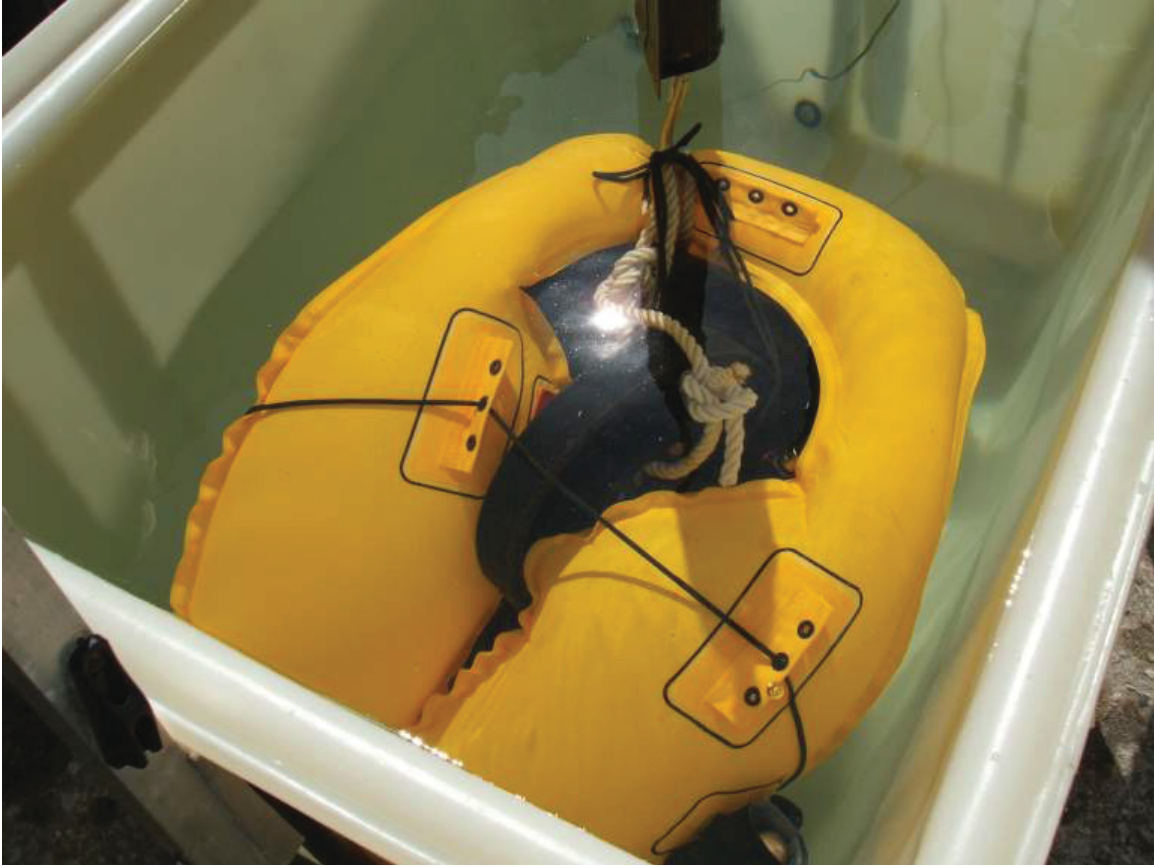


Figure 6 Buoyancy Test of CF Jet Aircrew LP/SV Bladder using 45g CO₂ canister

Annex B Sample Calculations

Test 1:

1. Total Weight:

$$= \text{Bladder Dry Weight} + 45 \text{ lbs Submersed Weight} + 10 \text{ lbs Submersed Weight}$$

$$= 2 \text{ lbs} + 38 \text{ lbs} + 9 \text{ lbs}$$

$$= 49 \text{ lbs}$$

2. After Bladder was lowered into water, the scale showed:

$$= 8 \text{ lbs}$$

3. Therefore, total buoyant force generated by inflated bladder:

$$= 49 \text{ lbs} - 8 \text{ lbs}$$

$$= 41 \text{ lbs}$$

Therefore it produced 41 lbs of buoyancy.

References

1. Firth, J.A, R.W. Smith and J.C. Steffler (1983), "Evaluation of Canadian Forces Life Preservers to Determine Compliance with Air Standardization Coordinating Committee Air Standard 61/4", DCIEM No. 83-C-38, July 1983.
2. Martin, N.A. (1986), "Performance of Several Aircrew Life Preservers in Conjunction with Various Clothing Ensembles, DCIEM No. 86-R-24, May 1986

List of symbols/abbreviations/acronyms/initialisms

CF	Canadian Forces
CO ₂	Carbon dioxide
DCIEM	Defence and Civil Institute of Environmental Medicine
DRDC	Defence Research Development Canada
LP/SV	Life Preserver/Survival Vest

Distribution list

Document No.: DRDC Toronto TN 2011-116

LIST PART 1: Internal Distribution by Centre

0

 TOTAL LIST PART 1

LIST PART 2: External Distribution by DRDKIM

1 Library and Archives Canada

1

 TOTAL LIST PART 2

1 TOTAL COPIES REQUIRED

UNCLASSIFIED

DOCUMENT CONTROL DATA <small>(Security classification of the title, body of abstract and indexing annotation must be entered when the overall document is classified)</small>		
1. ORIGINATOR (The name and address of the organization preparing the document, Organizations for whom the document was prepared, e.g. Centre sponsoring a contractor's document, or tasking agency, are entered in section 8.) Publishing: DRDC Toronto Performing: DRDC Toronto Monitoring: Contracting:		2. SECURITY CLASSIFICATION (Overall security classification of the document including special warning terms if applicable.) UNCLASSIFIED (NON-CONTROLLED GOODS) DMC A REVIEW: GCEC JUNE 2010
3. TITLE (The complete document title as indicated on the title page. Its classification is indicated by the appropriate abbreviation (S, C, R, or U) in parenthesis at the end of the title) LP/SV Bladder Buoyancy Test Comparison (U) not required (U)		
4. AUTHORS (First name, middle initial and last name. If military, show rank, e.g. Maj. John E. Doe.) Bill Martell, Ryan Wolter		
5. DATE OF PUBLICATION (Month and year of publication of document.) July 2011	6a. NO. OF PAGES (Total containing information, including Annexes, Appendices, etc.) 24	6b. NO. OF REFS (Total cited in document.) 2
7. DESCRIPTIVE NOTES (The category of the document, e.g. technical report, technical note or memorandum. If appropriate, enter the type of document, e.g. interim, progress, summary, annual or final. Give the inclusive dates when a specific reporting period is covered.) Technical Note		
8. SPONSORING ACTIVITY (The names of the department project office or laboratory sponsoring the research and development – include address.) Sponsoring: Tasking:		
9a. PROJECT OR GRANT NO. (If appropriate, the applicable research and development project or grant under which the document was written. Please specify whether project or grant.)	9b. CONTRACT NO. (If appropriate, the applicable number under which the document was written.)	
10a. ORIGINATOR'S DOCUMENT NUMBER (The official document number by which the document is identified by the originating activity. This number must be unique to this document) DRDC Toronto TN 2011-116	10b. OTHER DOCUMENT NO(s). (Any other numbers under which may be assigned this document either by the originator or by the sponsor.)	
11. DOCUMENT AVAILABILITY (Any limitations on the dissemination of the document, other than those imposed by security classification.) Unlimited distribution		
12. DOCUMENT ANNOUNCEMENT (Any limitation to the bibliographic announcement of this document. This will normally correspond to the Document Availability (11). However, when further distribution (beyond the audience specified in (11) is possible, a wider announcement audience may be selected.) Unlimited announcement		

UNCLASSIFIED

UNCLASSIFIED

DOCUMENT CONTROL DATA

(Security classification of the title, body of abstract and indexing annotation must be entered when the overall document is classified)

13. **ABSTRACT** (A brief and factual summary of the document. It may also appear elsewhere in the body of the document itself. It is highly desirable that the abstract of classified documents be unclassified. Each paragraph of the abstract shall begin with an indication of the security classification of the information in the paragraph (unless the document itself is unclassified) represented as (S), (C), (R), or (U). It is not necessary to include here abstracts in both official languages unless the text is bilingual.)

(U) Background: The buoyancy of CF jet aircrew LP/SV is unknown and may not provide the minimum 35 lbs that is required. The buoyant force of the British MK 30 LCX is also unknown; however, this flotation device utilizes a large bladder and may replace the LP/SV. Aim: The aim of this experiment was to calculate and compare the buoyant force of the CF LP/SV and the British MK 30 LCX. Methods: Bladders were inflated using either a 35g or a 45g CO2 canister. A Chatillon spring scale was used to measure the buoyant force following submersion. Results: The LP/SV and MK 30 LCX attained buoyant forces of 41 and 42 lbs respectively following inflation using a 35g CO2 canister, and 45 and 53 lbs respectively following inflation using a 45g CO2 canister. Conclusion: In all trials, both flotation devices produced buoyant forces greater than 35 lbs. The British MK 30 LCX produced larger buoyancy forces

(U) not required

14. **KEYWORDS, DESCRIPTORS or IDENTIFIERS** (Technically meaningful terms or short phrases that characterize a document and could be helpful in cataloguing the document. They should be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location may also be included. If possible keywords should be selected from a published thesaurus, e.g. Thesaurus of Engineering and Scientific Terms (TEST) and that thesaurus identified. If it is not possible to select indexing terms which are Unclassified, the classification of each should be indicated as with the title.)

(U) Aircrew Life Support Equipment; Life Preserver; Safety Vest

UNCLASSIFIED

Defence R&D Canada

Canada's Leader in Defence
and National Security
Science and Technology

R & D pour la défense Canada

Chef de file au Canada en matière
de science et de technologie pour
la défense et la sécurité nationale



www.drdc-rddc.gc.ca

